


# Precise Dispensing System

## INCREDIBLE PRECISION

3rd EDITION

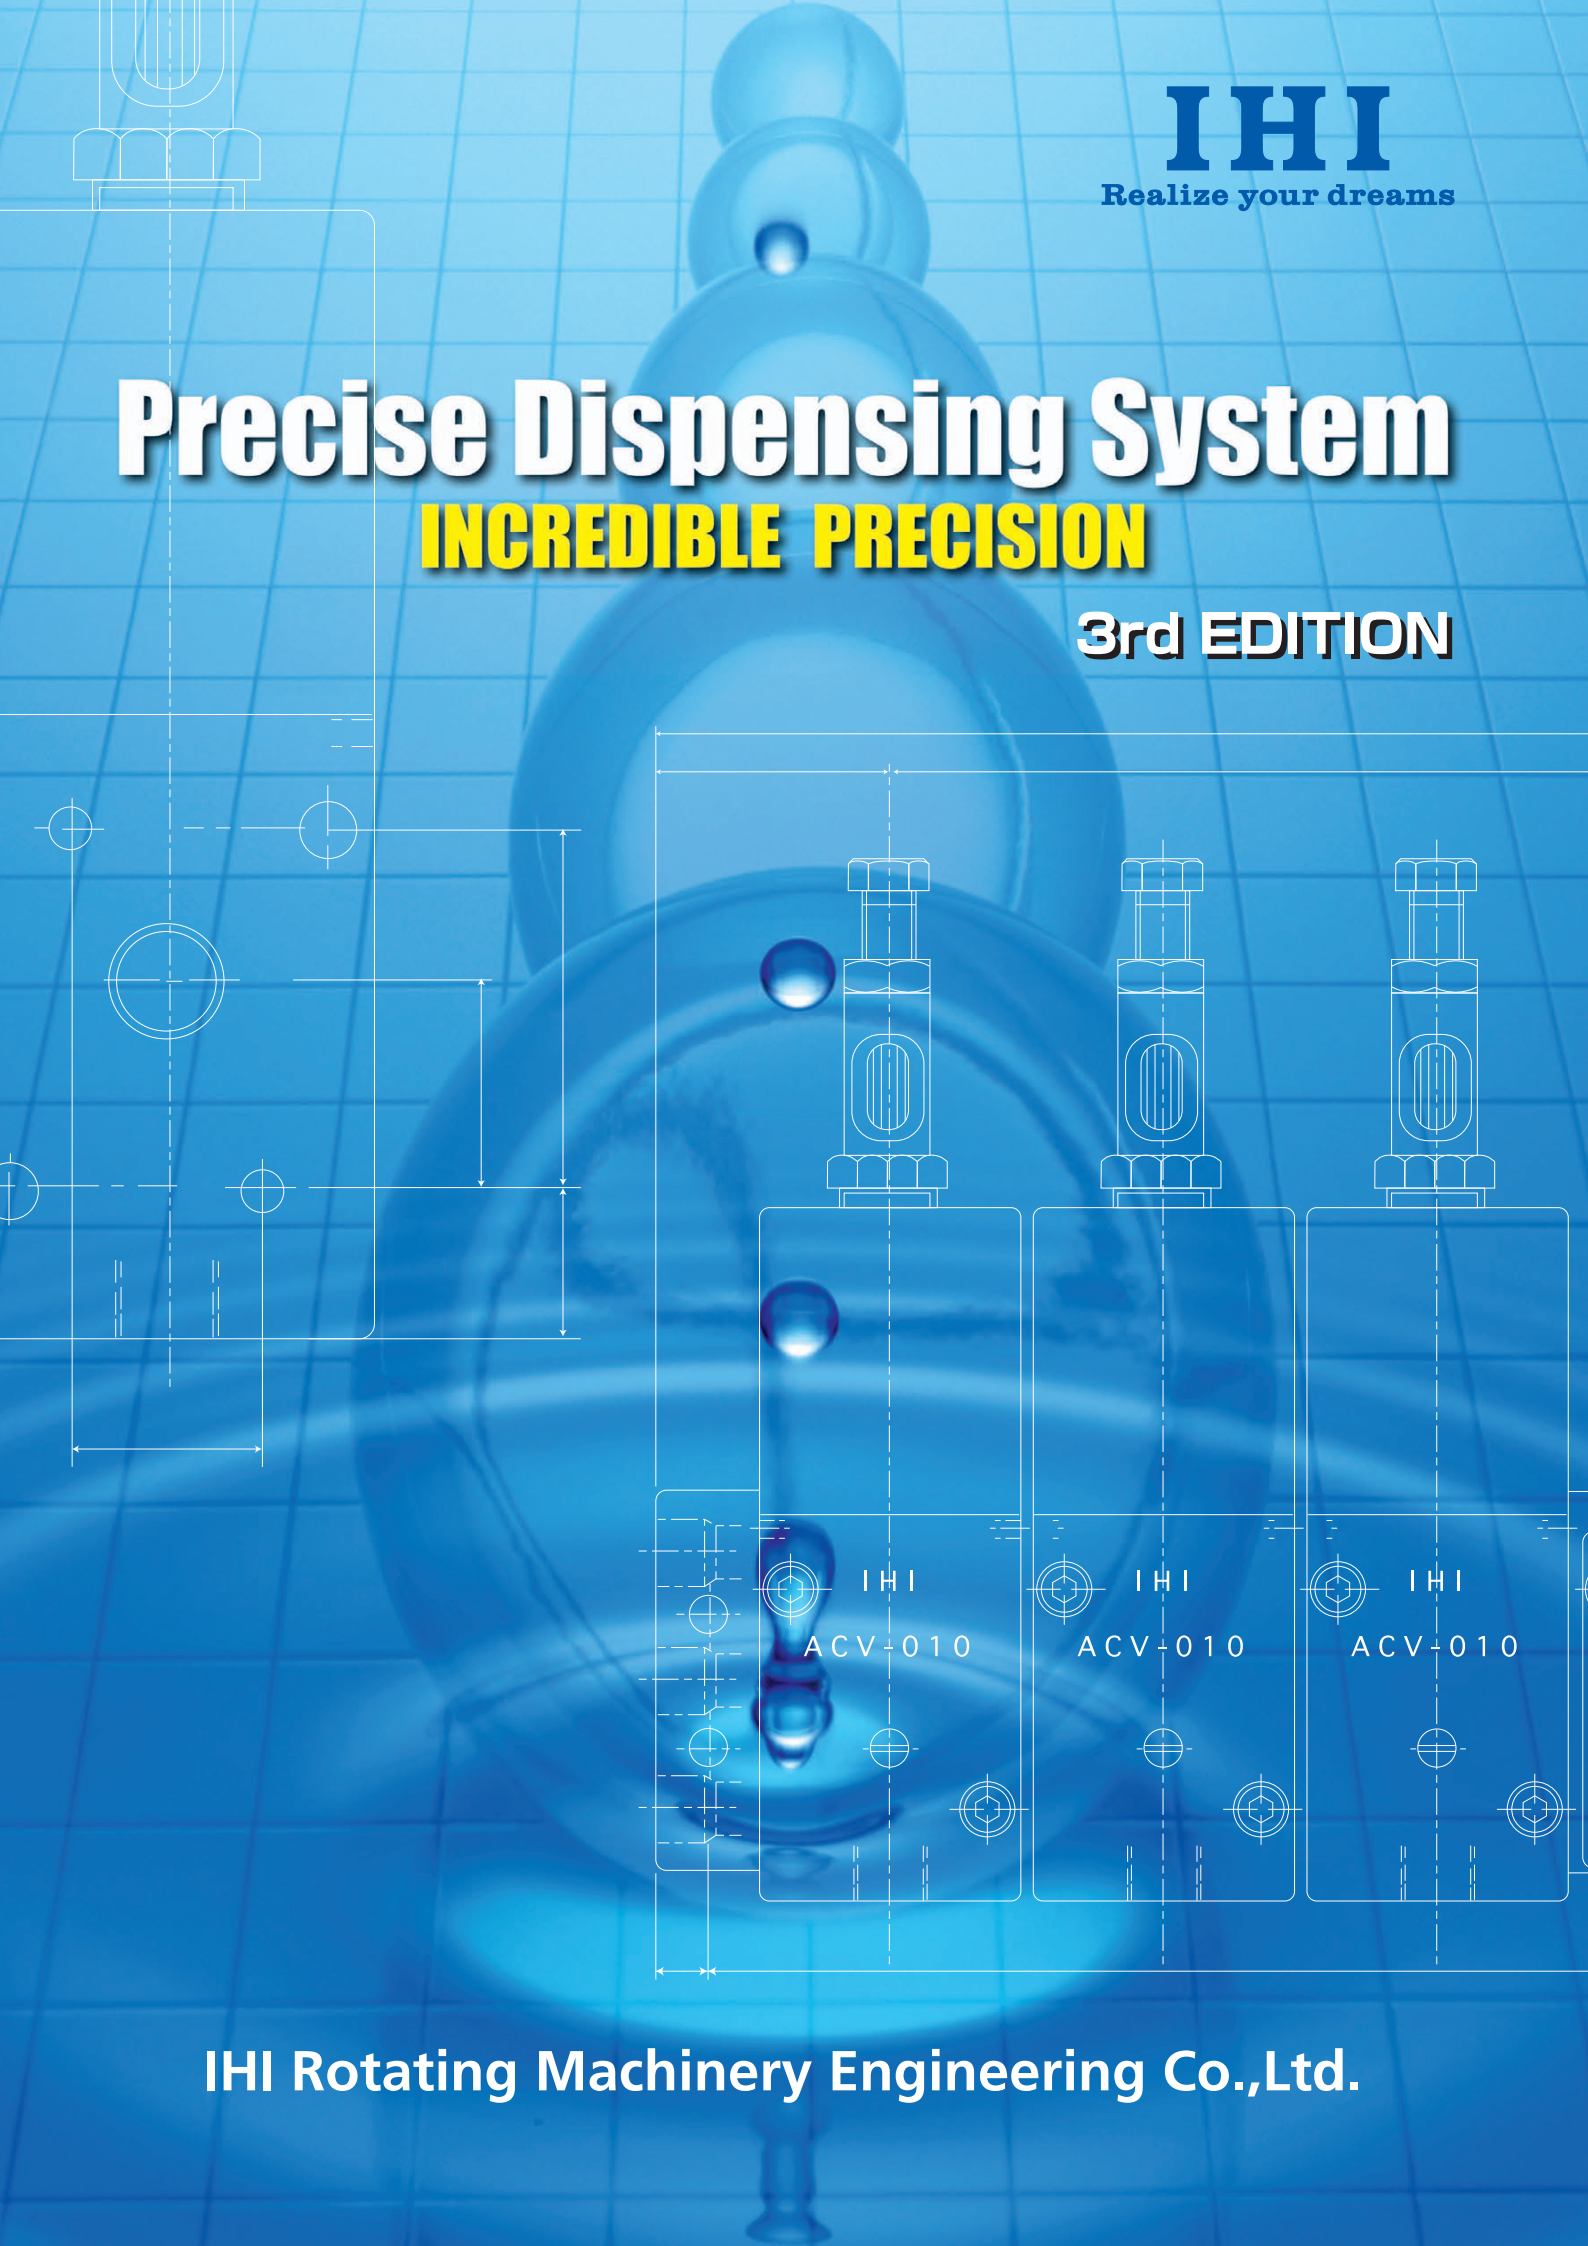

# CONTENTS

## Incredible Precision

Handle any changes in temperature or viscosity of the material / 2

Uses / 2

Precise Fluid Dispenser Selection Table/ 2

Air-operated pump Selection Table/ 2

## IHI Precise Dispensing System Application

Precise volume grease dispensing and filling / 3

Precise spot grease dispensing-ACV & CVM Precise Fluid Dispenser / 4

Relative position and flow of the nozzle and products /4

Applications Drawing of a grease line / 4

Precise volume dispensing system for various fluids / 5

Precise fluid volume control for one-component spray / 6

Remote oil spraying / 6

System Flow Chart ACG & ACV Series / 7

Bubble crusher system + Precise Fluid Dispenser with sensor / 8

## Air-operated Pump - ACG Series / 9

ACG-020 Air-operated pump / 9

ACG-040 Air-operated pump /10

ACG-020H Air-operated pump / 10

ACG-040H Air-operated pump / 10

ACG-011FK Air-operated pump / 11

## GSI-P334FK Grease station / 11

## ACV Precise Fluid Dispenser / 12.13.14.15

Description of ACV Dispenser Operation / 12

## CVM Precise Fluid Dispenser/ 16.17

Description of CVM Dispenser Operation / 16

## CVN Precise Fluid Dispenser/ 18

## Checking of Operation's Sensor for Precise Fluid Dispenser / 19

## Bubble Crusher-AST Series / 20.21.22

## Controllers

ACC-200 Controller for ACV Precise Fluid Dispenser / 23

ACC-300 Controller for ACG Pump / 23

## Air Control Panel / 24

# INCREDIBLE PRECISION

## IHI announces the birth of an epoch-making precise fluid dispenser that can handle any changes in temperature or viscosity of the materials.

The IHI precise fluid dispenser is capable of supplying a fixed amount of material with high accuracy. Precise Dispensing System are consisted of pneumatic pump for pumping lubricant and Precise dispenser for supplying lubricant to work pieces.

Pneumatic pump can use up the grease without waste until the neighborhood of pail bottom. We have a variety of precise dispensers. Therefore, you can select the type that best suits your system's materials and use. The dispensable volume can be precisely adjusted by an operational pneumatic system. In addition, the system is capable of suction backing, so there is no drops of backflow.

### Uses

- The manufacture and assembly of all kinds of automobile components for electrical wire connectors, brakes, door locks, windshield wipers, etc...
- The manufacture and assembly of semiconductors and electrical components for CD,DVD recorders, Video camera, Printer and Electrical appliances.
- The manufacture of ball and roller bearings, the maintenance of a proper level of oil filling in gas meters and other such devices and other manufacturing and assembling processes.

### Precise Fluid Dispenser Selection Table

Precise Fluid Dispenser model		ACV-001 SPP	ACV-002 SPP	ACV-010 SPP	ACV-020 SPP	CVM-03	CVM-10	CVM-50	CVM-100	CVM-200	CVN-02
Dispensing volume cm <sup>3</sup> /stroke/port	0.005 ~ 0.12	●									
	0.01 ~ 0.23		●								
	0.02 ~ 0.21										
	0.03 ~ 0.2										●
	0.04 ~ 1.2			●							
	0.05 ~ 0.3				●	●					
	0.06 ~ 2.0				●		●				
	0.2 ~ 1.2						●				
	0.5 ~ 5.0							●			
	2 ~ 10								●		
4 ~ 20									●		
Required pressure (fluid line)	3MPa or less	●	●	●	●						
	5.9~14.7MPa					●	●	●	●	●	
	5.9~20.6MPa										●
Required pressure (air line)	0.2~0.7MPa	●	●	●	●						
	0.3~0.7MPa					●	●	●	●	●	●
Used grease (NLGI No.)	No.0~No.2	●	●	●	●	●	●	●	●	●	●
Referring of page		12	12	12	—	16	16	16	16	16	18


### Air-operated pump Selection Table

Air-operated pump model		ACG-011FK	ACG-020	ACG-040	GSI-P334FK
Viscosity of grease (NLGI No.)	No.0~No.2	●	●	●	●
Container	1can	●			
	2.5can	●			
	16·18can (pail can)		●	●	●
Referring of page		11	9, 10	10	11


# IHI PRECISE DISPENSING SYSTEM APPLICATION

## Precise volume grease dispensing and filling


Applicable for Automobile parts and Home electronics.

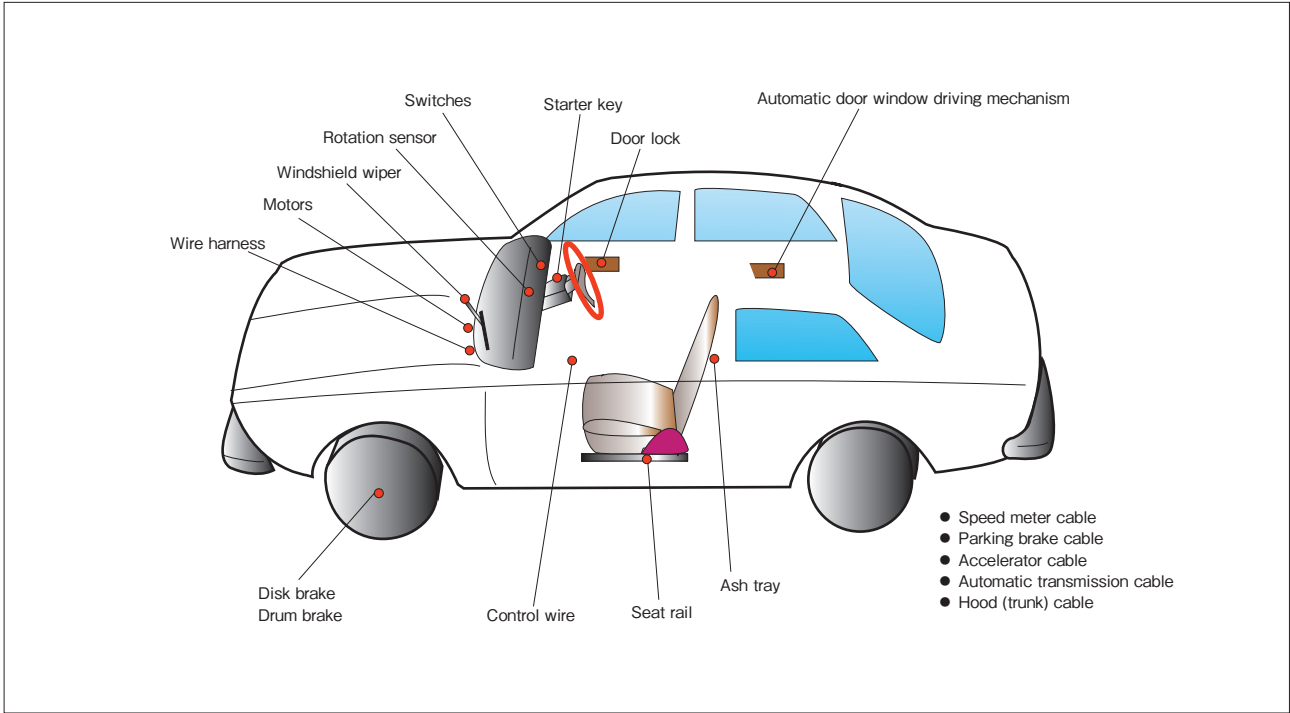

### Grease filling for automobile wire harness connector

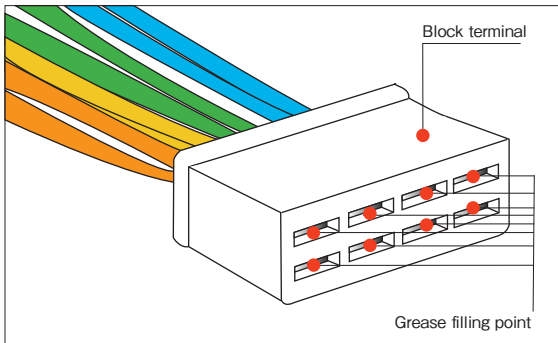


### Grease dispensing for seat slide rail of automobile



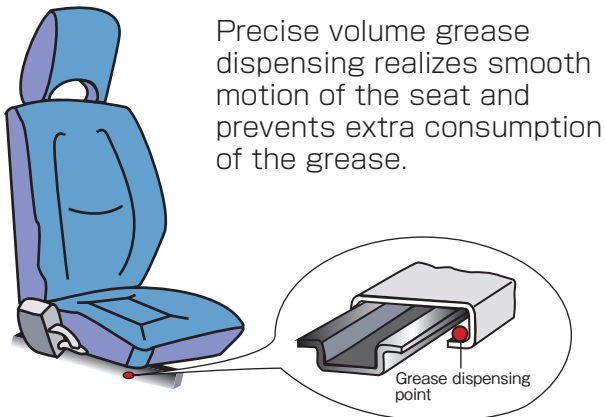


### Grease dispensing for housing of audio set, etc.

Precise volume grease dispensing for rotating/swinging part of CD,DVD recorders and Video camera, etc. makes their operation smooth and eliminates noise.

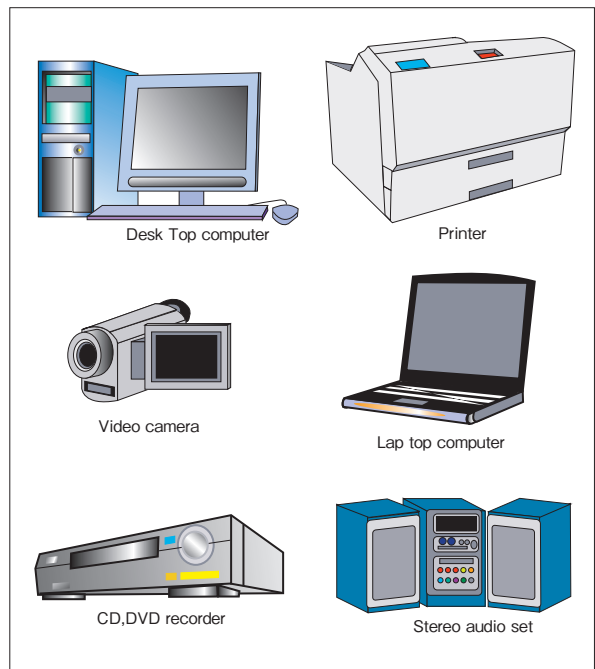


## Precise spot grease dispensing

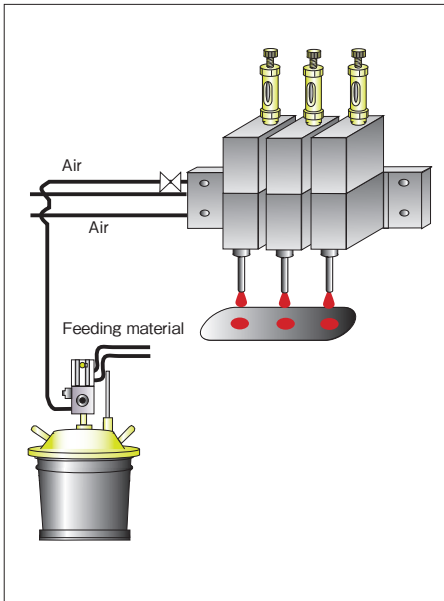


### Knowhow to achieve precise spot dispensing

- (i) nozzle comes down → dispensing → nozzle rises and OFF pilot plunger and OFF main plunger.
- (ii) Adjust the clearance between the nozzle end and grease surface depend on grease Q'ty → keep the nozzle end not to go into the grease.

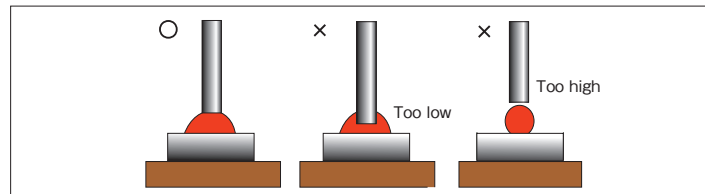


## Relative position and flow of the nozzle and products

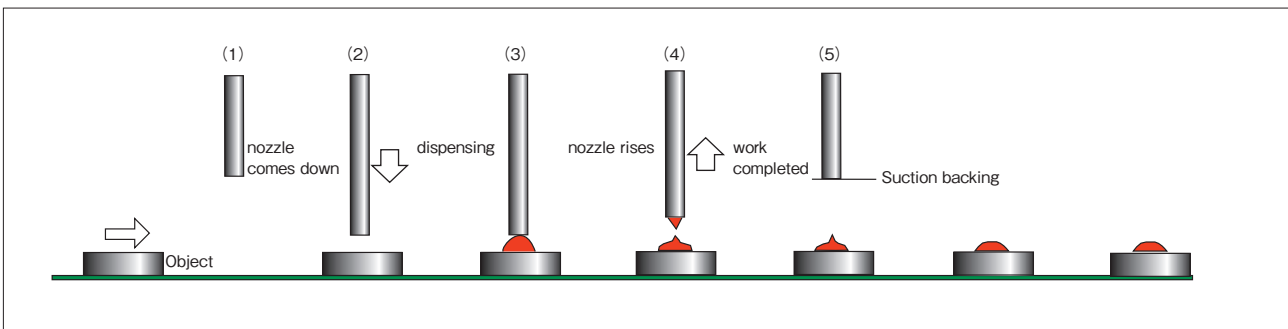


# Precise volume dispensing system for various fluids


Oil can be discharged precisely by using Precise Fluid Dispenser ACV-□□□L for oil.

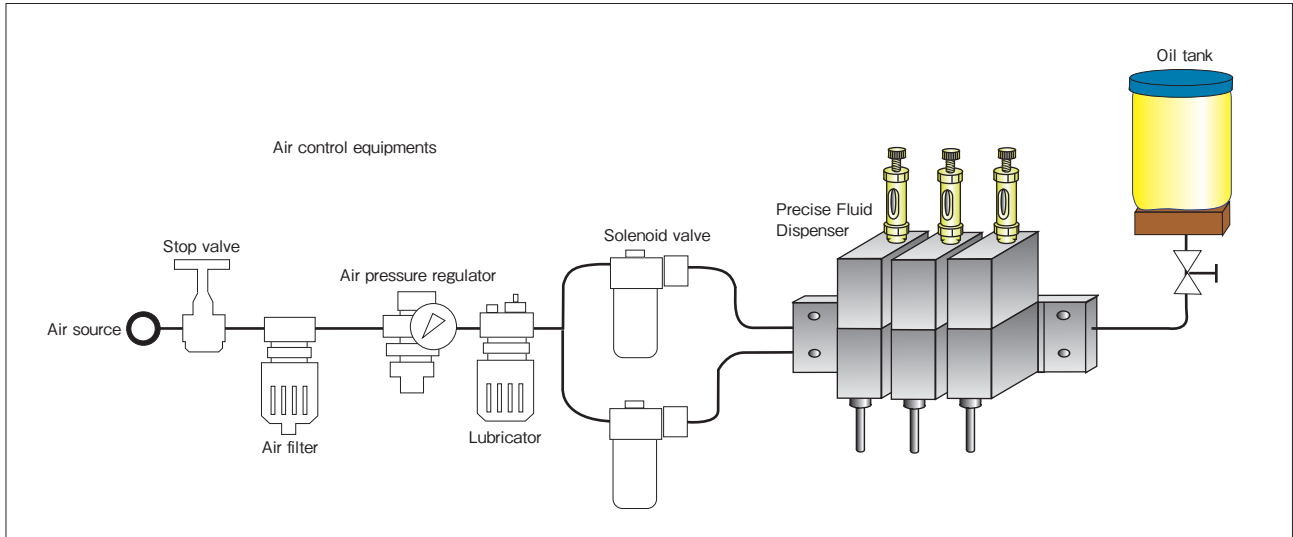


## Silicon oil dispensing

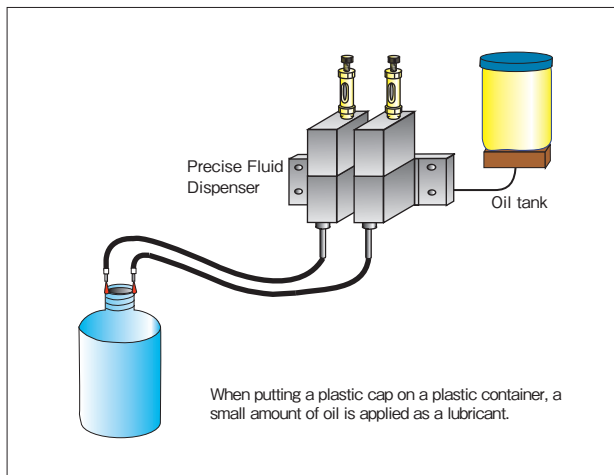


## Dispensing of press-die removal oil

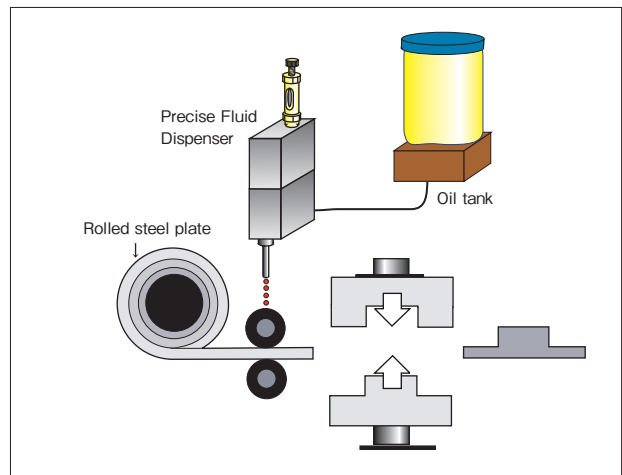

## Dispensing of Coating oil

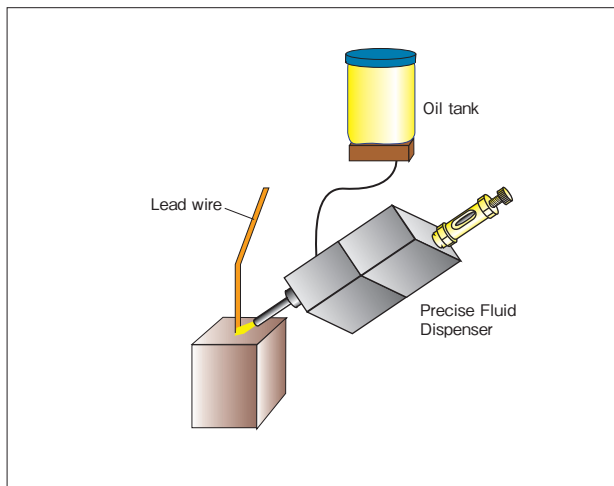

## Oil dispensing for chain

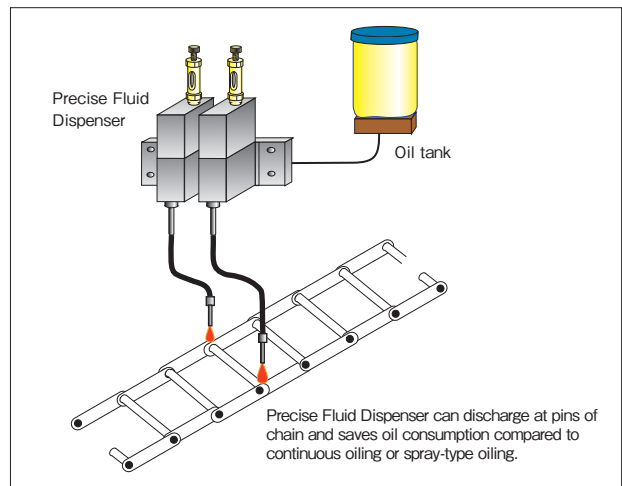

## Precise fluid volume control for one-component spray


The method to spray liquid by the power of the compressed air is called two-component spray. On the one hand, the method to apply high pressure direct to liquid and spray is called one-component spray.

Splash by one-component spray is much less than that of two-component spray. It is an eco-friendly spray method.


Use of ACV Precise Fluid Dispenser enables one-component spray.

Spraying condition is changed with the viscosity of the liquid, the amount and the air pressure, so please ask us.

### Spraying of press-die removal oil

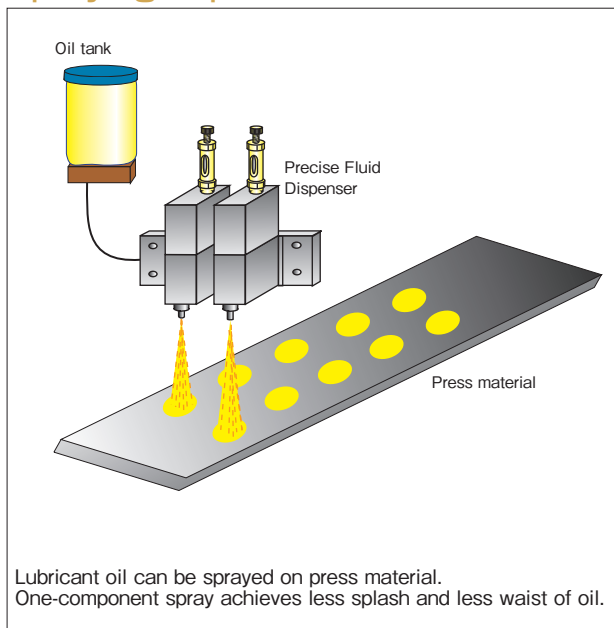


### Spraying of mold-releasing agent

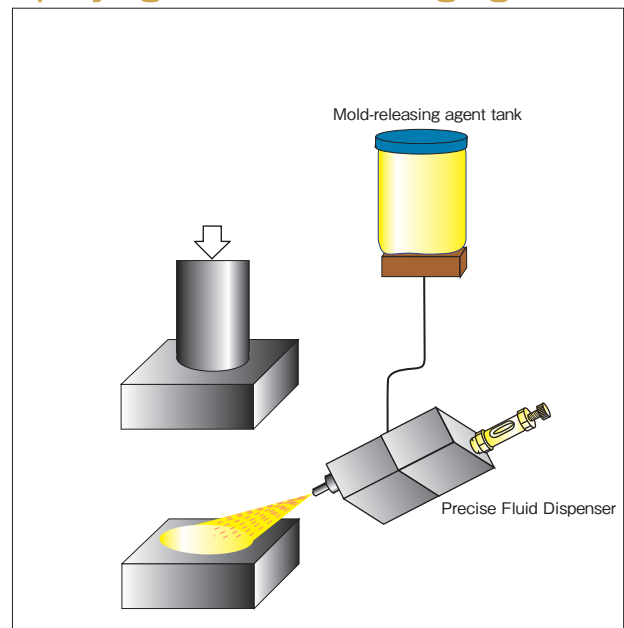

## Remote oil spraying

Oil can be sprayed to horizontal direction.

Spray distance may vary depending on fluid viscosity and volume, and air pressure. Please contact us in details.

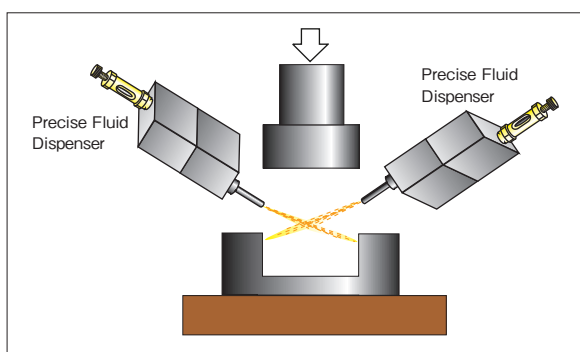


### Oiling to press mould

Lubrication oil for press-mould can be sprayed.


### Oiling to gear

Oil can be sprayed to the gear with vertical tooth surface.


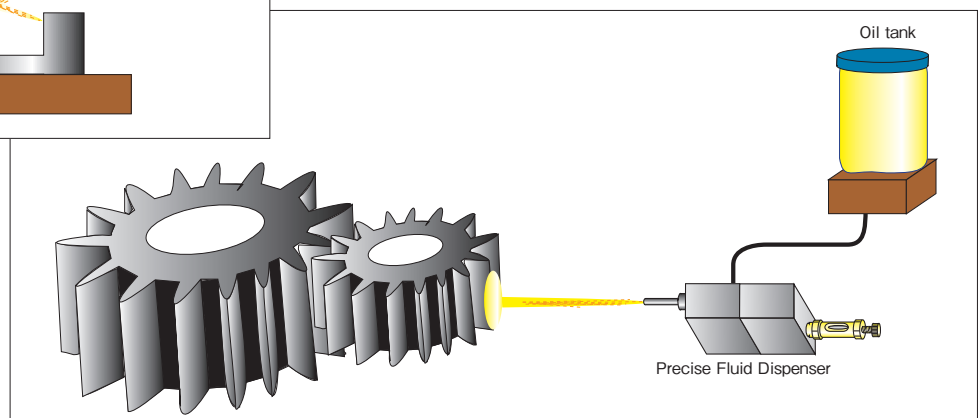


# System Flow Chart - ACG & ACV Series

## Circuit Diagram

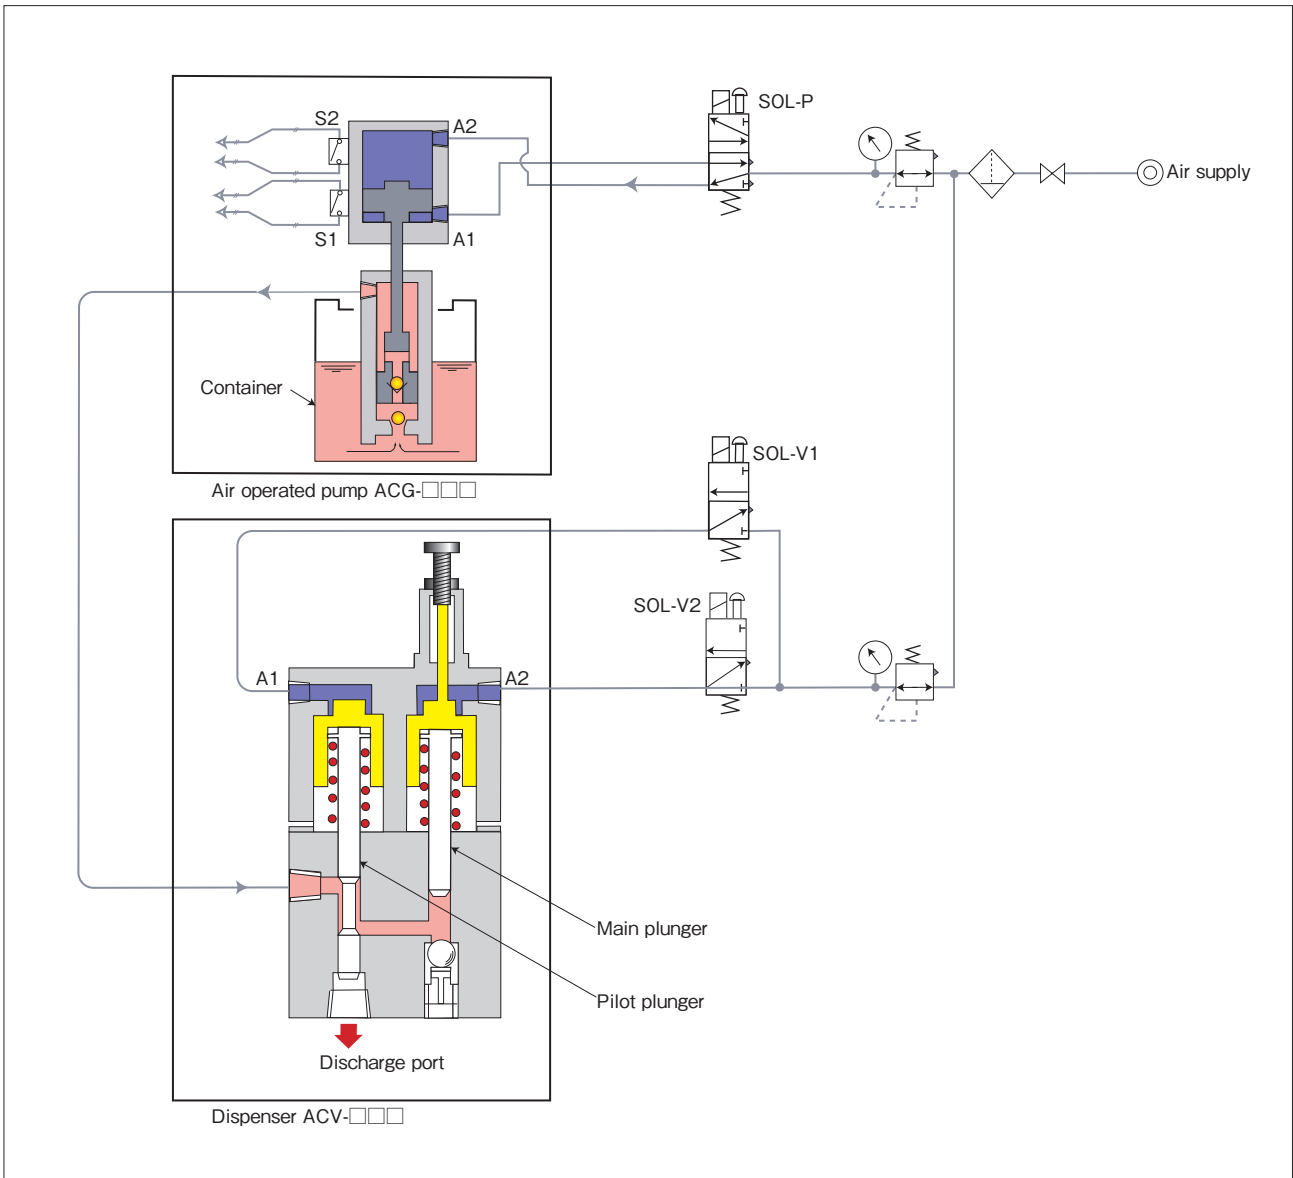


## Time Charts

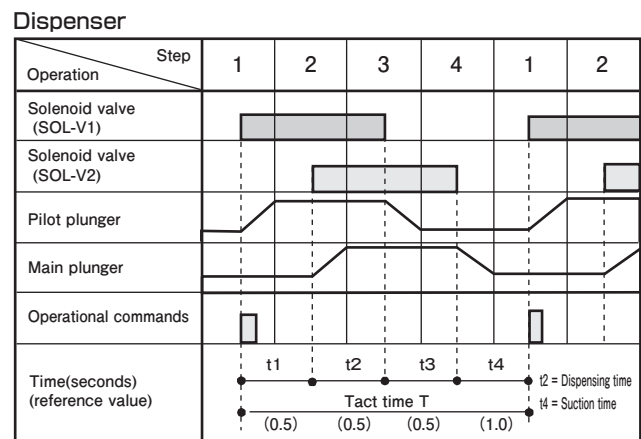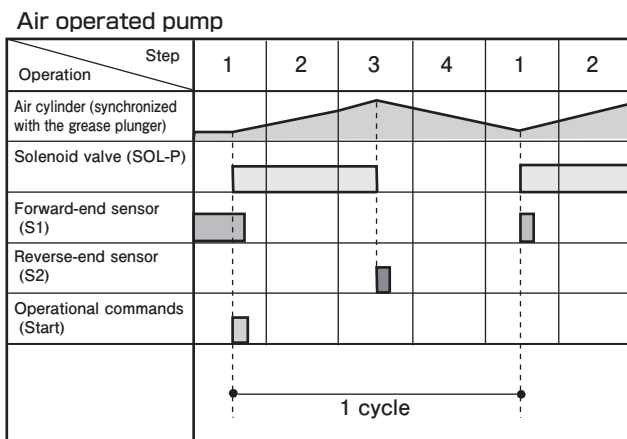

※On the control, you don't need to link Air operated pump and dispenser.



## Non-dispensing Prevention System (Bubble crusher system + Precise Fluid Dispenser with sensor)

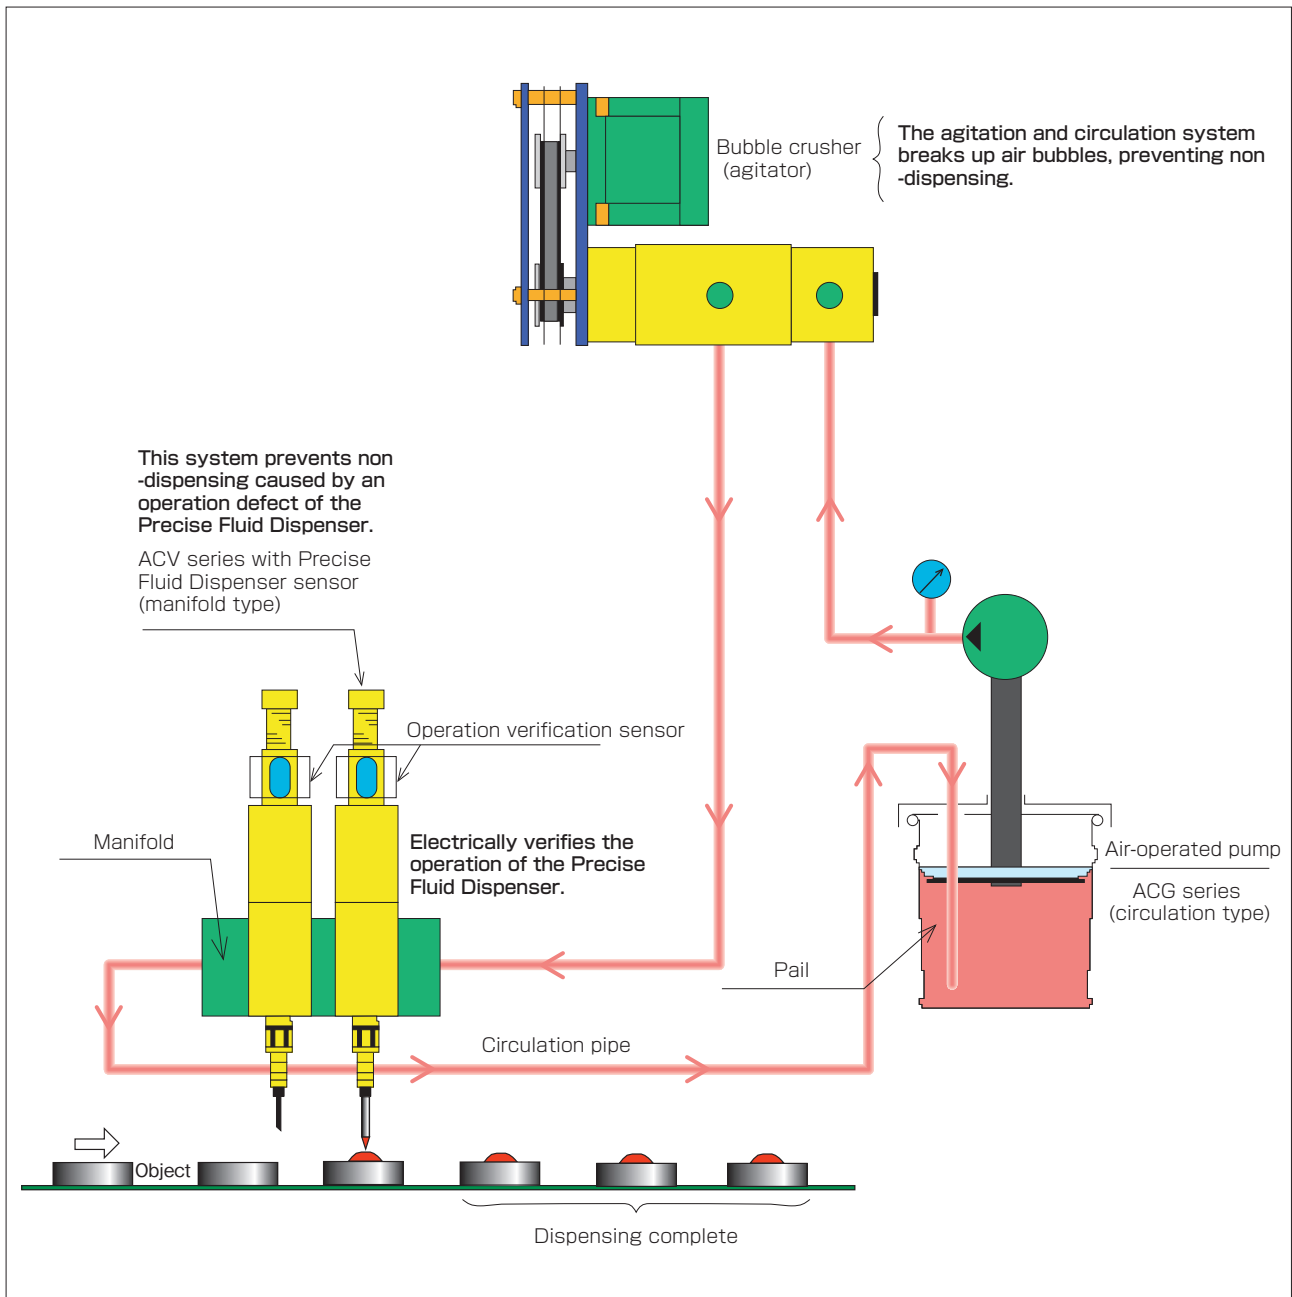

## Double systems prevent non-dispensing

### Point 1

The bubble crusher (agitation and circulation system) breaks up air bubbles, preventing Non- dispensing.(Refer to P20.)

### Point 2

The sensor electrically verifies the operation of the Precise Fluid Dispenser (indicator rod).(Refer to P19.)

# Air-operated pump - ACG Series

## FEATURE for Air-operated Pump of ACG series

1. No loss is caused for most types of grease except for special type one.
2. Oil separation can be minimized because a follower plate is only put on the grease and the grease is not pressed at high pressure.
3. No grease disposal for air purge is required when pail can be is exchanged.

### Applicable Pail Specifications


\*specifications of pail can be used for Model ACG-020, ACG-040 and GSI-P334FK are as follows:

Specifications of adaptable pail can


Model	Inner diameter		Inner height	Capacity (liter)
	Top	Bottom		
1-type	285±3	272±3	315±5	18
2-type	285±3	272±3	342±5	20

JIS Z1620/Type 1,2 and Model 1,2

### During Use

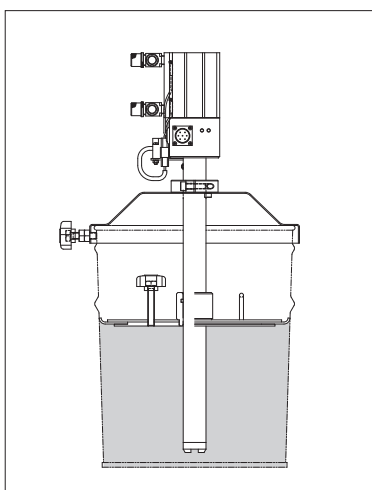

### After Use

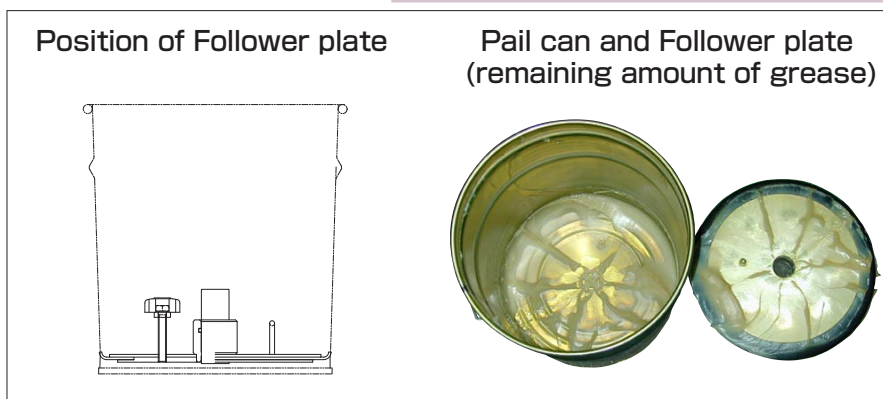


When you use up grease until the pail bottom, it may cause a air suction. Please be careful of this point (you can adjust it by the height of the low level switch of the pump, for remaining grease amount.)

## ACG-020 Air-operated pump used for ACV Precise Fluid Dispenser (Product code: RK970800)

This pump is developed for a Pail can. (Pail can is not included.)

### Specifications

Item	Specifications	
Discharge volume	24 cm <sup>3</sup> /cycle	
Pump ratio	8:1	
Discharge pressure	3.1 MPa/at air pressure 0.4MPa	
Min. operating air pressure	0.2MPa	
Supply air pressure	0.2~0.4MPa	
Adaptable can	Pail can (*Refer to the applicable pail specifications on this page.)	
Air consumption	100 NL/min (at air pressure 0.4MPa)	
Sensor switch for air cylinder (With LED indicator)	Model	ZE135A, 2-wire contact type
	Operating voltage range	DC10~28V
	Load current range	4~20mA (25°C) 4~10mA (60°C)
	Voltage drop for internal resistance	4V MAX.
Low level switch (With LED indicator)	Model	FL2R-12K6H (N/C)
	Operating voltage range	DC10~30V
	Load current range	4~100mA
Mass	Approx. 11 kg	

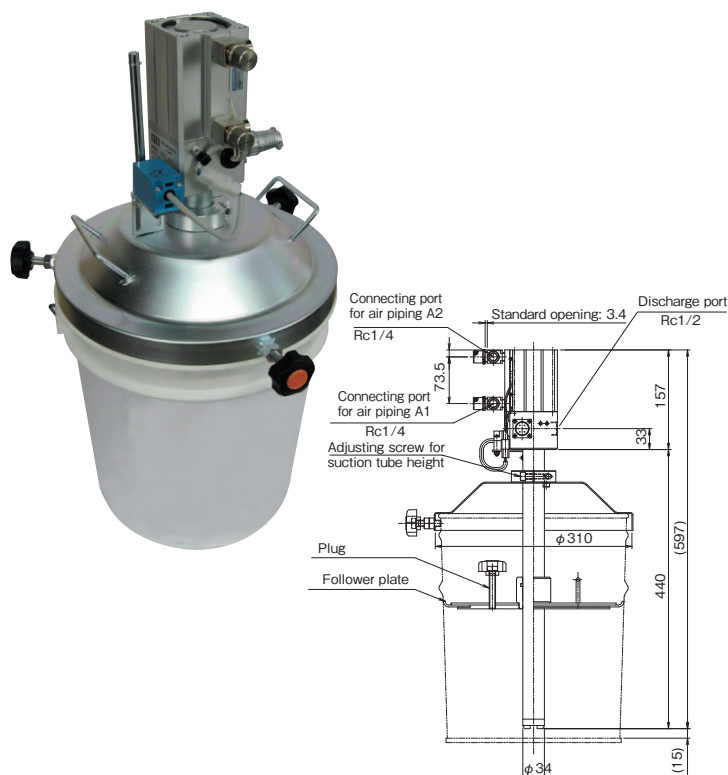

Sensor Switch of air cylinder has been changed to a non-contact method. Since July 2014


## ACG-040 Air-operated pump used for CVM Precise Fluid Dispenser (Product code: RK970900)

This high pressure pump is developed for a pail can. (Pail can is not included.)

### Specifications

Item	Specifications	
Discharge volume	21 cm <sup>3</sup> /cycle	
Pump ratio	20:1	
Discharge pressure	9.8MPa/at air pressure 0.5MPa	
Min. operating air pressure	0.3MPa	
Supply air pressure range	0.4~0.6MPa	
Adaptable can	Pail can (*Refer to the applicable pail specifications on P9.)	
Air consumption	300 NL/min (at air pressure 0.5MPa)	
Sensor switch for air cylinder (With LED indicator)	Model	ZE135A, 2-wire contact type
	Operating voltage range	DC10~28V
	Load current range	4~20mA (25°C) 4~10mA (60°C)
	Voltage drop for internal resistance	4V MAX.
	a leakage current	0.7mA MAX. (DC24V,25°C)
Low level switch (With LED indicator)	Model	FL2R-12K6H (N/C)
	Operating voltage range	DC10~30V
	Load current range	4~100mA
Mass	Approx. 12kg	


Sensor Switch of air cylinder has been changed to a non-contact method. Since July 2014

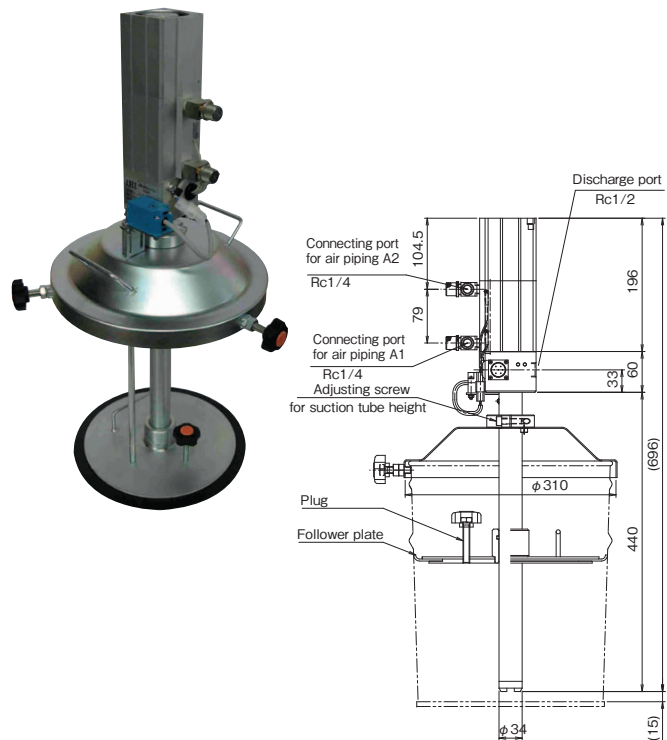


## ACG-020H Air-Operated Pump used for ACV Precise Fluid Dispenser (Product code: RK970500)

This pump improves suction performance by pump own weight, making it possible to handle grease with relatively high stickiness as well. Please be careful to construct Hose, Tube and Cable that connect to the pump not to apply the reaction force or tension to the pump and not to interfere with the raising and lowering of the pump.

## ACG-040H Air-Operated Pump used for CVM Precise Fluid Dispenser (Product code: RK971000)

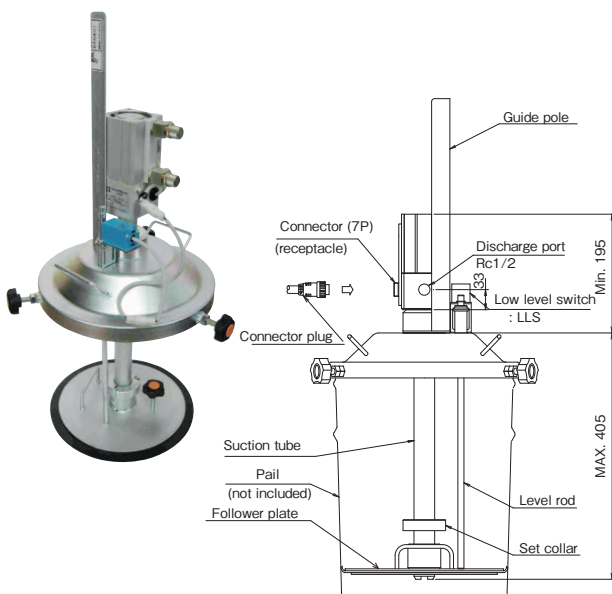

\*Refer to ACG-020 pump specifications on P9.

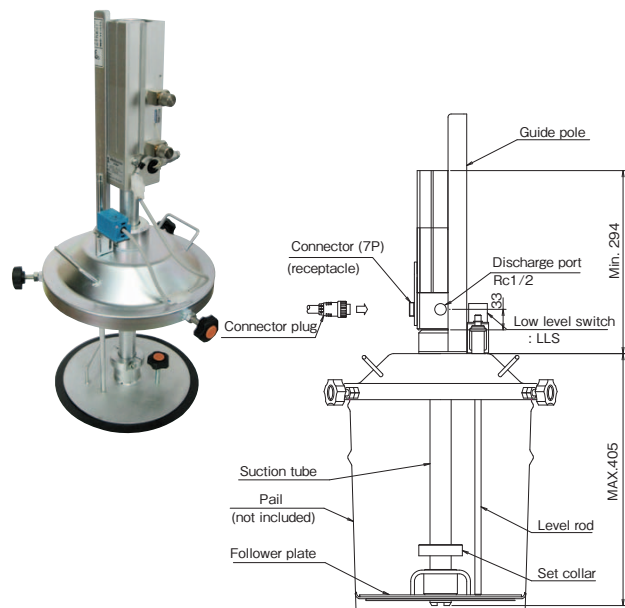

\*Refer to ACG-040 pump specifications on this page.

## ACG-01 1FK Air-Operated Pump (Air Lifter Type) (Product code: RK970400)

This pump is a small-sized supply pump developed for use with a 1-kg to 2.5-kg grease pail. (The grease pail is not included.)



- Simple grease pail replacement
- Provided with air device and pressure gauge as standard

### Specifications

Item	Specifications	
Discharge volume	6.3cm <sup>3</sup> /cycle	
Pump ratio	5:1	
Dispensing pressure	Max. 2.5 MPa, with an air pressure of 0.5 MPa	
Air supply pressure	For pump (RP): 0.3~0.5 MPa For lifter (RL): 0.2 MPa or less	
Air consumption	64 NL/min. (with an air pressure of 0.4 MPa)	
Air cylinder sensor switch (S1, S2)	Model	ZE135A(2-lead wire Solid State Type)
	Load voltage	DC10-28V
	Load current	4~20mA at 25°C[77F], 10mA at 60°C[140F]
	Internal voltage drop	4V MAX.(depends on load current)
	Leakage current	0.7mA MAX.(DC24V, 25°C[77F])
Low level switch (LLS)	Model	GX-12MLUB (Turns ON at approach)
	Working voltage range	DC12~24 V, Ripple P-P 10% or less
	Current consumption	0.8 mA or less
Air solenoid valve (SOL)	Output	Load current: 3~70 mA, Residual voltage: 3 V or less
	Model	G110-4E1-PSL-24V
	Working voltage range	DC21.6~26.4 V, Rating: DC24 V
	Current value	21 mA (with a rated voltage of 24 V applied)
Solenoid specifications	Lead wire	Length: 300 mm, + side: Red, - side: Black
	Solenoid specifications	Single solenoid 2 positions, 5 ports
Applicable grease	NLGI Nos. 0~2, 1-kg to 2.5-kg pails	
Mass	Approx. 6kg (follower plate and grease pail not included)	

\*The follower plate is fabricated in accordance with the shape of the grease pail and the composition of the grease.

When ordering, please provide us with a grease pail drawing and grease brand.  
Sensor Switch of air cylinder has been changed to a non-contact method. Since July 2014

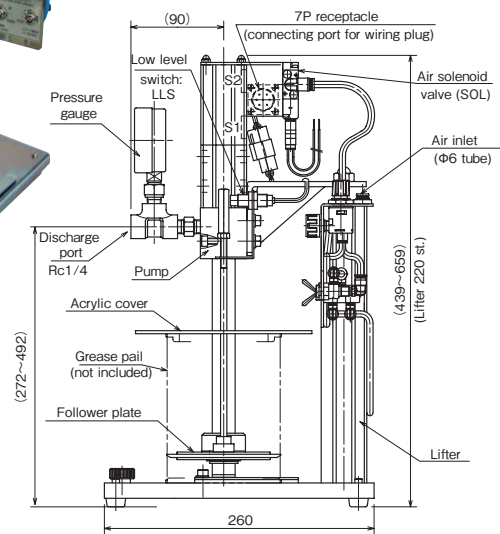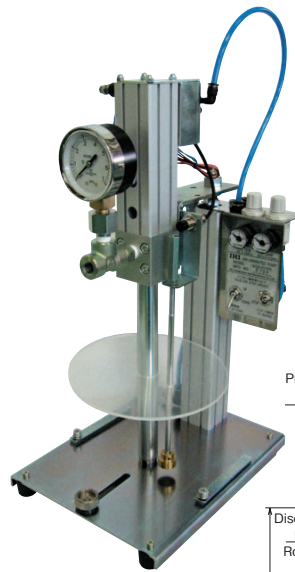


## GSI-P334FK Grease station used for CVM Precise Fluid Dispenser (Product code: RK972500)

※GSI-P334FK is made-to-order, please ask us about the delivery date.

### Specifications

Item	Specifications
Discharge volume	11 cm <sup>3</sup> /cycle
Pump ratio	34 : 1
Dispensing pressure	MAX. 22.5MPa
Operating air pressure	0.3~0.7MPa
Applicable grease	NLGI 0~2
Applicable pail	Pail(*)Refer to page 9 for the applicable pail specification
Mass	Approx. 47kg (excluding pail)

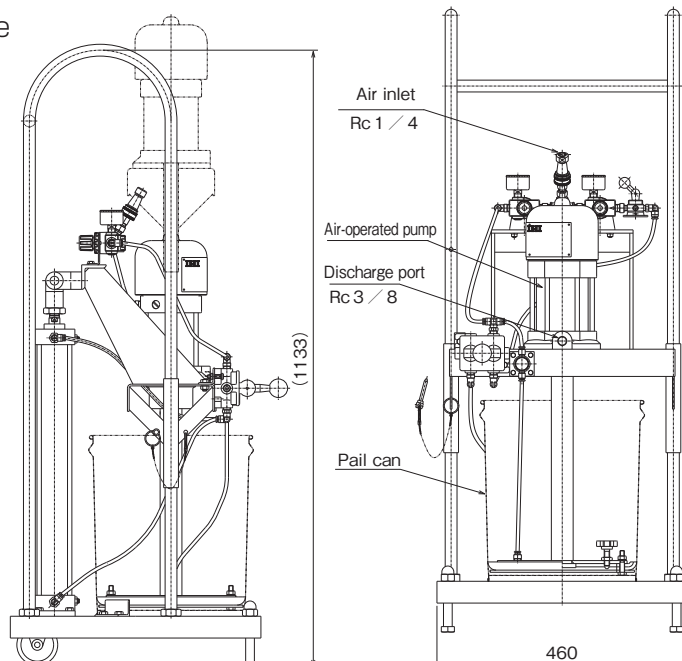

# ACV Precise Fluid Dispenser

Low Pressure Specification

This series of Precise Fluid Dispenser operate by means of air pressure.  
 No high-pressure compression on supply materials is required. For low liquidity fluid, no supply pump is required. For high viscous materials, ACG-020 or ACG-011FK of low discharge pressure Supply Pump or pressure tank is used.  
 The Precise Fluid Dispenser consists of manifolds to easily increase or decrease the number of discharge ports by means of block plates.



## ● Applicable materials Grease, Oil

Note: Do not use pumps made by other manufacturers in combination with Precise Fluid Dispenser. Doing so results in the risk of Precise Fluid Dispenser failure.


When using a pump, use the dedicated pump ACG-011 FK or ACG-020

## ● Specification

Item	Model	Product code	Model	Product code	Model	Product code	Model	Product code
Item	ACV-001SPP	RK386700	ACV-002SPP	RK386800	ACV-010SPP	RK386900	ACV-020SPP	RK387000
	ACV-001L	RK381600	ACV-002L	RK382900	ACV-010L	RK381900	ACV-020L	RK387300
Dispensing volume	0.005~0.12cm <sup>3</sup> /stroke		0.01~0.23cm <sup>3</sup> /stroke		0.04~1.2cm <sup>3</sup> /stroke		0.06~2.0cm <sup>3</sup> /stroke	
Supply air pressure	0.2~0.7MPa							
Fluid pressurization	MAX.3MPa							
Pump ratio	1:14		1:9		1:9		1:7	
Mass	Approx. 0.45kg		Approx. 0.45kg		Approx. 1.6kg		Approx. 1.6kg	

(For outline drawings, refer to P13-P15.)

ACV-020 series is non-stocked item.

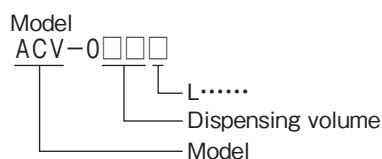

SPP...For grease.....Page 13

L.....For oil.....Page 15

S.....With indicator rod of pilot plunger

F.....Pilot plunger is made by SUS  
 (Please contact us in details.)

DD...Both pilot plunger and main plunger are of double-action type.  
 (Please contact us in details.)


With sensor...With sensor for operation verification...Page19

## Description of ACV Dispenser Operation

Refer to page 7 for time chart


### 1 Standby (Main plunger goes up and suction)

(Continuation from Step [4])  
 With the air solenoid valve (SOL-V2) OFF, air in the air cylinder (Upper) on the main side is exhausted from A2. The air piston (M) and main plunger rises (up) under the force of spring. In this case, the fluid is sucked below the main plunger, and the dispenser enters the standby state.

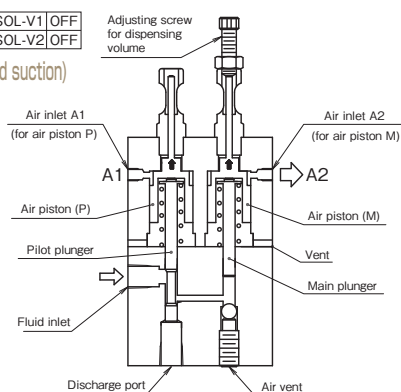


### 2 Pilot plunger goes down

With the air solenoid valve (SOL-V1) ON, Air comes in the upper portion of air cylinder on the pilot side from A1. Along with lowering of the air piston (P), the pilot plunger lowers (down). At end of lowering, the dispensing outlet and the lower passage of main plunger open.

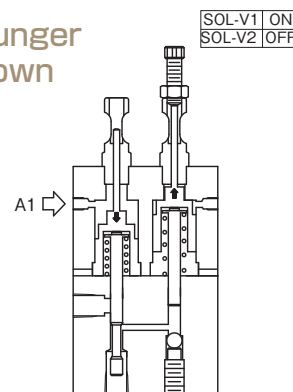


### 3 Dispensing process (Main plunger goes down)

With the solenoid valve (SOL-V2) ON, air comes in the upper portion of air cylinder on the main side from A2. Along with lowering of the air piston (M), the main plunger lowers (down). In this case, fluid accumulated under the main plunger is dispensed through the discharge port to the nozzle side.

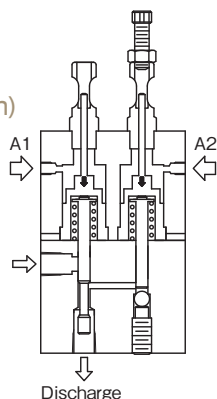


### 4 Pilot plunger goes up

With the air solenoid valve (SOL-V1) OFF, air in the air cylinder is exhausted from A1. The air piston and plunger on the pilot side go (up) under the force of spring. In this case, the dispenser draws back the fluid accumulating in the discharge port, preventing fluid dripping. This function is called [Suction back].

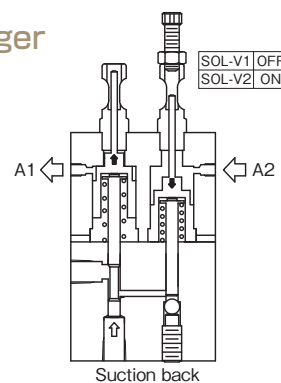


# Outline

## ACV-001SPP Precise Fluid Dispenser (Main Unit only)

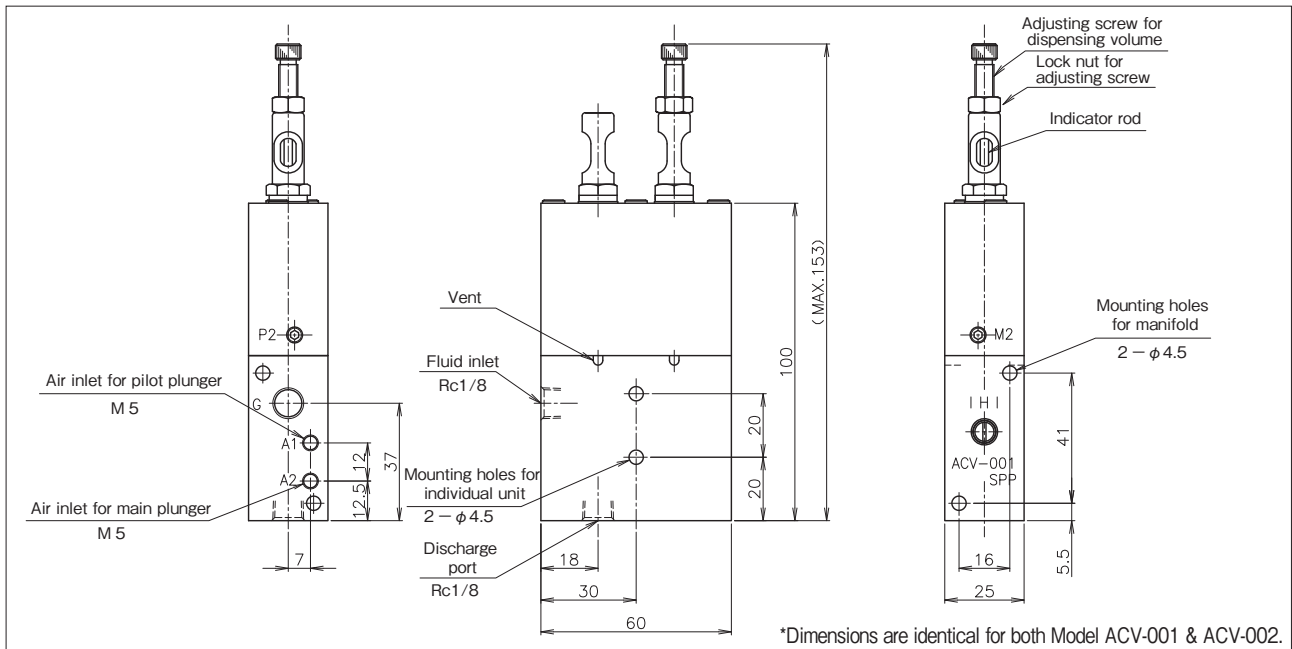

## ACV-001SPP Precise Fluid Dispenser (Manifold Type)

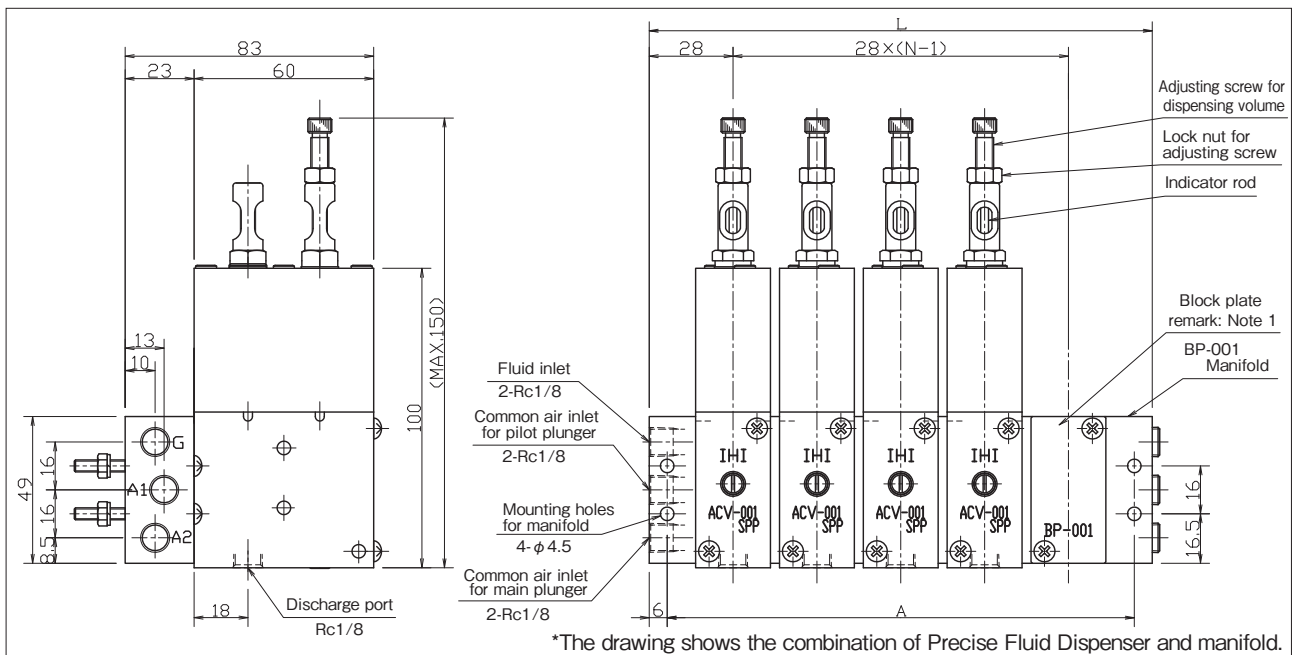

## Manifold specifications (The product code in the table does not include Precise Fluid Dispenser unit)

Product code	Manifold model	Number of outlets N	L	A	Mass of a whole unit including Precise Fluid Dispenser (kg)
RK871200	MC2-001	2	84	72	1.15
RK871300	MC3-001	3	112	100	1.67
RK871400	MC4-001	4	140	128	2.19
RK871500	MC5-001	5	168	156	2.71
RK871600	MC6-001	6	196	184	3.22
RK871700	MC7-001	7	224	212	3.75


Note 1: The position where Precise Fluid Dispenser is not used can be plugged by a BP-001 Block plate (Product code: RK872900) sold separately.

Note 2: Manifold specifications for ACV-002 Precise Fluid Dispenser are common to the above table.


Note 3: Recommended mounting screw for manifold: 4-M4x40L

Note 4: Precise Fluid Dispenser and manifold are delivered respectively.

## ACV-010SPP Precise Fluid Dispenser (Main Unit only)

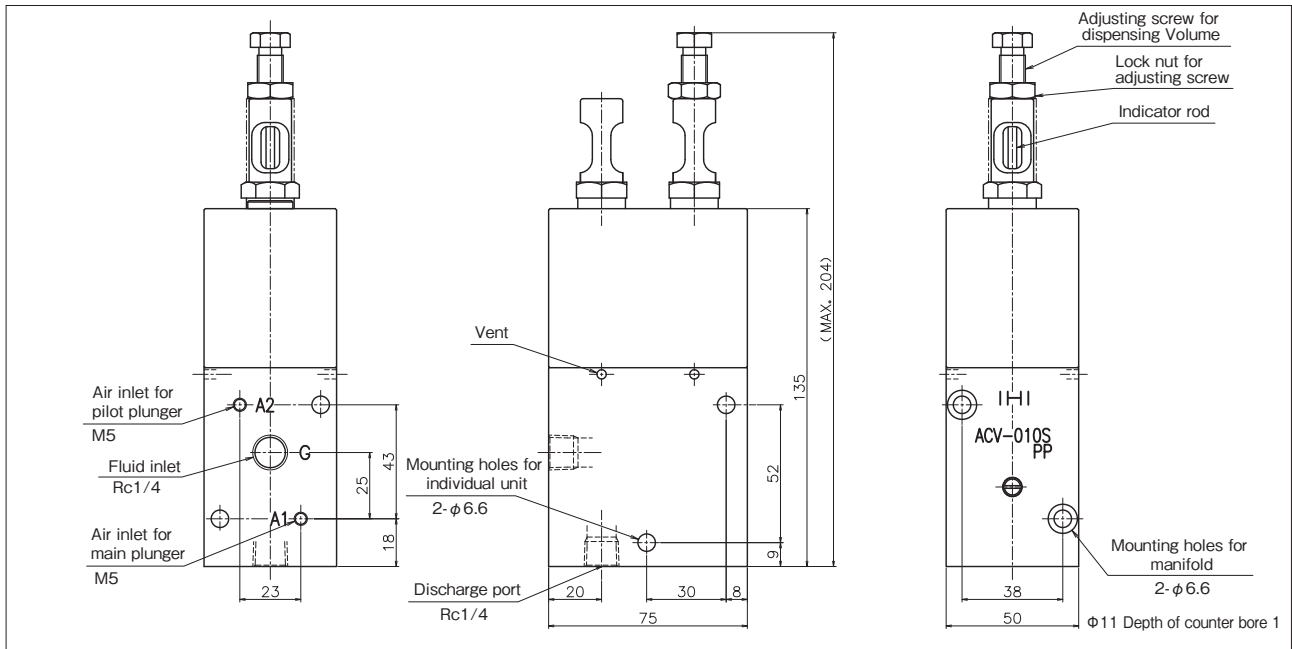

## ACV-010SPP Precise Fluid Dispenser (Manifold type)

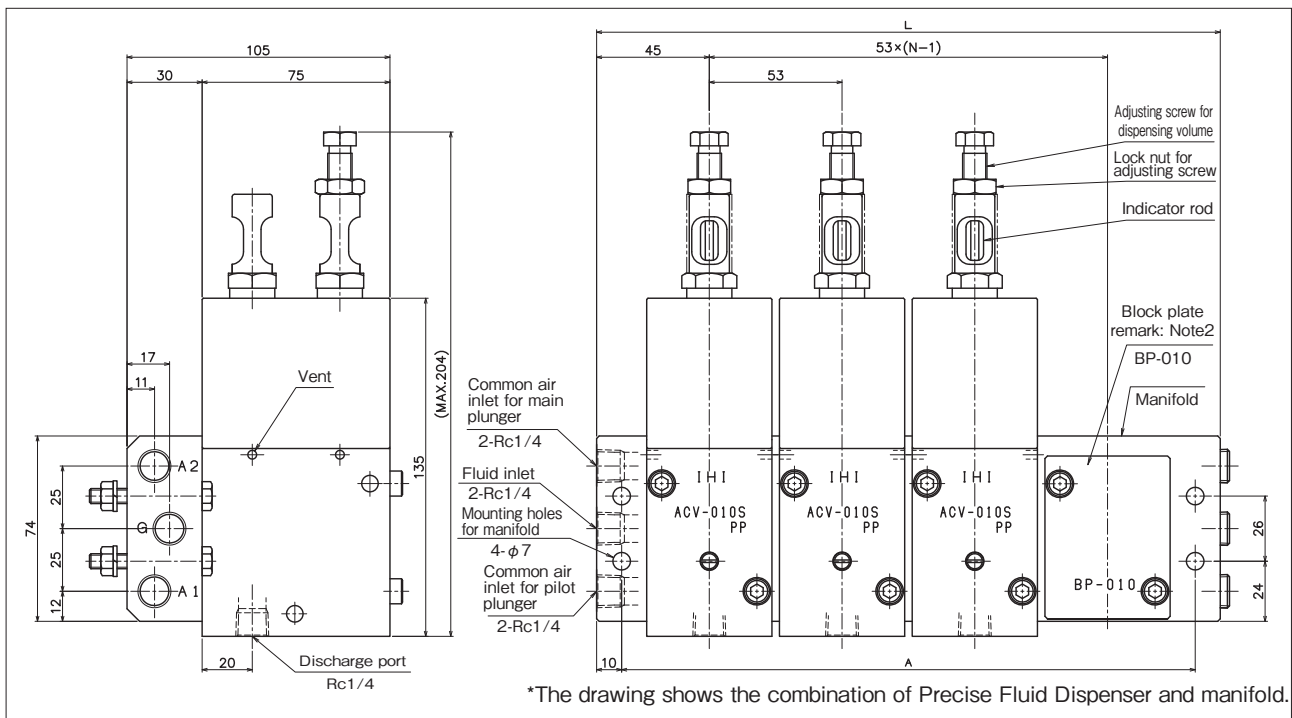

## Manifold specifications (The product code in the table does not include Precise Fluid Dispenser unit)

Product code	Manifold model	Number of outlets N	L	A	Mass of a whole unit including Precise Fluid Dispenser (kg)
RK872300	MC2-010	2	143	123	3.5
RK872400	MC3-010	3	196	176	5.2
RK872500	MC4-010	4	249	229	6.9

Note 1: The number of outlet five and more can be manufactured. (Please contact us in details.)

Note 2: The position where Precise Fluid Dispenser is not used can be plugged by a BP-010 Block plate (Product code: RK873000) sold separately.

Note 3: Recommended mounting screw for manifold: 4-M6x45L


Note 4: Precise Fluid Dispenser and manifold are delivered respectively.

# ACV-001L Precise Fluid Dispenser (For oil)


Suction-back function is eliminated from Model ACV-001L.

(When a Precise Fluid Dispenser with suction-back function is used for oil, surrounding air is sucked through a nozzle and dispensing oil volume becomes unstable.)

## ACV-001L Precise Fluid Dispenser (Main unit only)

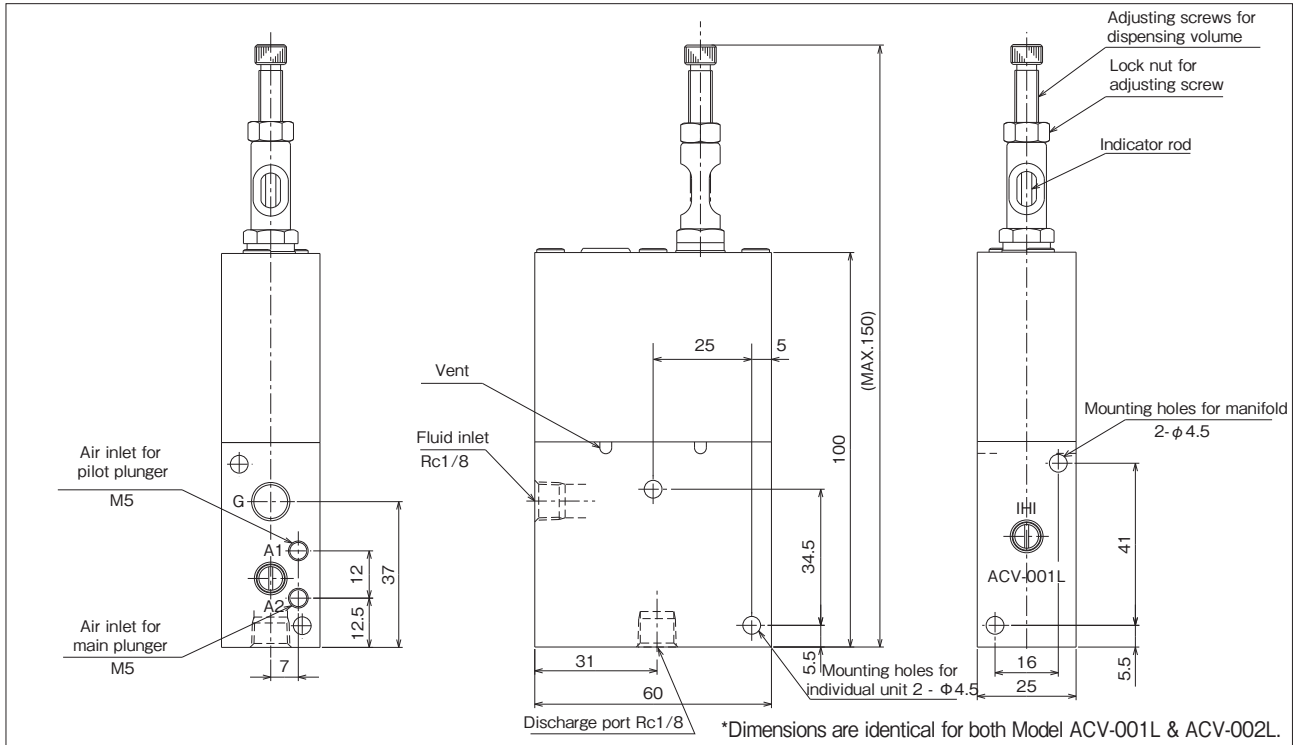

## ACV-010L Precise Fluid Dispenser (Main unit only)

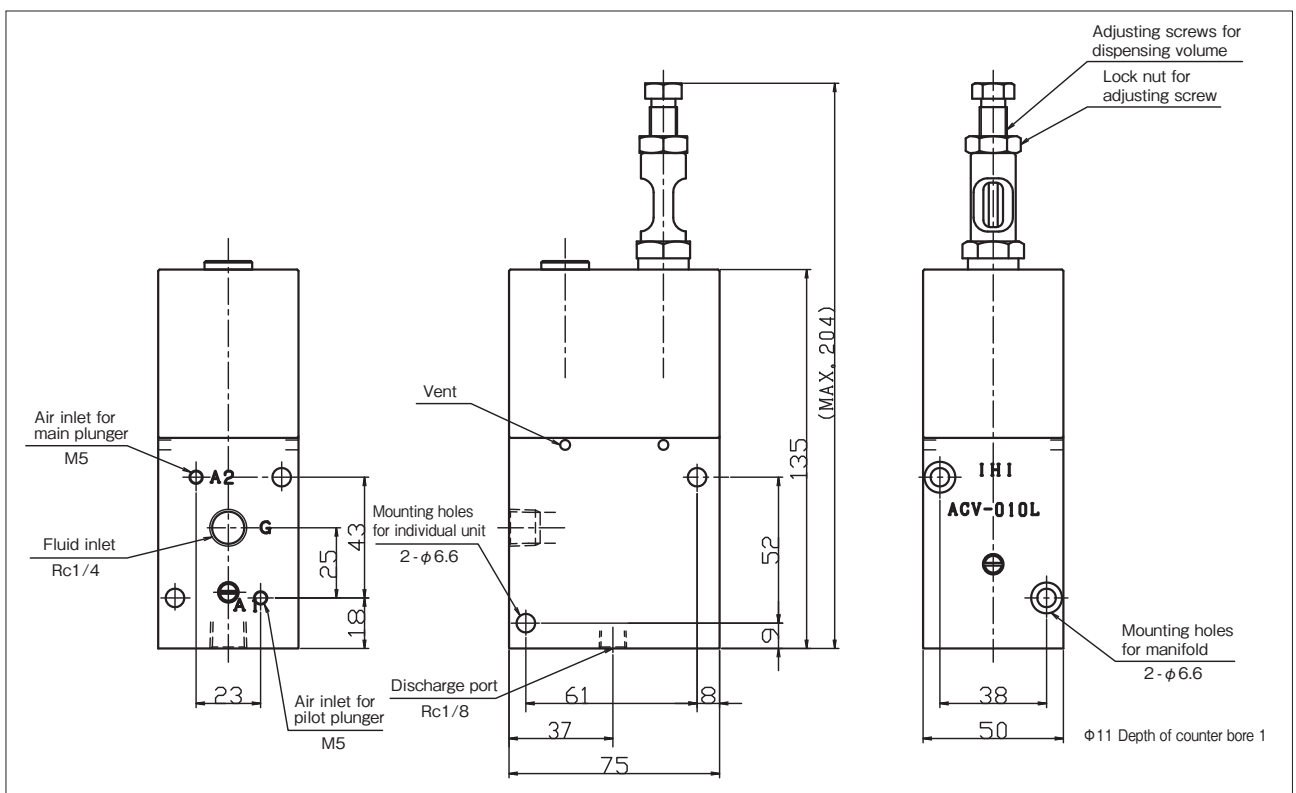



# CVM Precise Fluid Dispenser

High Pressure Specification

- Pilot block and main block are separated. Discharge volume can be changed by exchange only main block while pilot block is left as it is.
- Selling unit is one set. (Pilot Block + Main Block)
- Up to 4 blocks can be combined as one assembled body by utilizing tie bolts.(Refer to chart on page 17)
- Large, middle, small valves can be combined as one assembled body.
- Pilot plunger is of double action type, hence 5-way air solenoid valves shall be applied.

## ● Specification


Supply material: Grease (Oil is not applicable.)

Item	Specifications				
	CVM-03	CVM-10	CVM-50	CVM-100	CVM-200
Dispensing volume	0.05~0.3 cm <sup>3</sup> /stroke	0.2~1.2 cm <sup>3</sup> /stroke	0.5~5 cm <sup>3</sup> /stroke	2~10 cm <sup>3</sup> /stroke	4~20 cm <sup>3</sup> /stroke
Working pressure range	Grease line				
	Air line				
Proof pressure for grease line	20.6MPa				
Used grease	NLGI No.0~No.2				
Produce No.	RK792100	RK792500	RK792900	RK793300	RK793700
Mass	Approx. 1.4 kg	Approx. 1.5 kg	Approx. 1.6 kg	Approx. 3.6 kg	Approx. 4.3 kg

## Description of CVM Dispenser Operation


### 1 Standby SOL-V OFF

With the air solenoid valve OFF, the air comes in the air cylinder from its bottom (B). The top side (A) is open to the atmosphere. The main plunger stops at the top point due to difference in the area receiving the pressure. In this case, the grease comes through the inlet into the bottom side of the main plunger for filling.

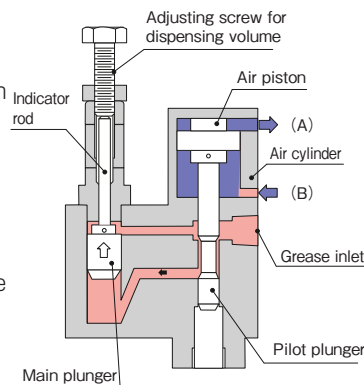


### 2 Pilot plunger goes down SOL-V ON

When the air solenoid valve is turned ON, the air comes from the top (A) of air cylinder, lowering the pilot plunger. Accordingly, the grease that has come through the inlet flows through the upper pass to come in the top of main plunger. On the other hand, the lower pass of main plunger is connected to the discharge port.




### 3 Dispensing process (Main plunger goes down) SOL-V ON

The discharge port opens to the atmosphere, so that the main plunger lowers under the grease pressure, dispensing the grease filled in the lower chamber.

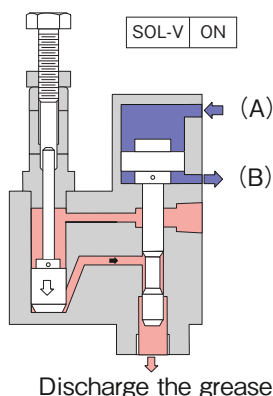


### 4 Pilot plunger goes up SOL-V OFF


With the solenoid valve OFF, the air comes through the bottom (B) of the air cylinder (with the top side (A) opening to the atmosphere). The pilot plunger rises along with the air piston. Accordingly, the grease flowing through the inlet comes the bottom side of main plunger, and the main plunger rises due to difference in the area receiving the pressure. In the case, the dispenser draws back the fluid accumulating in the discharge port. Preventing fluid dripping. The function is called "Suction back".

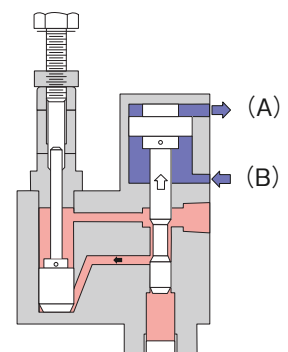

# Outline Drawings (Assembled Examples)

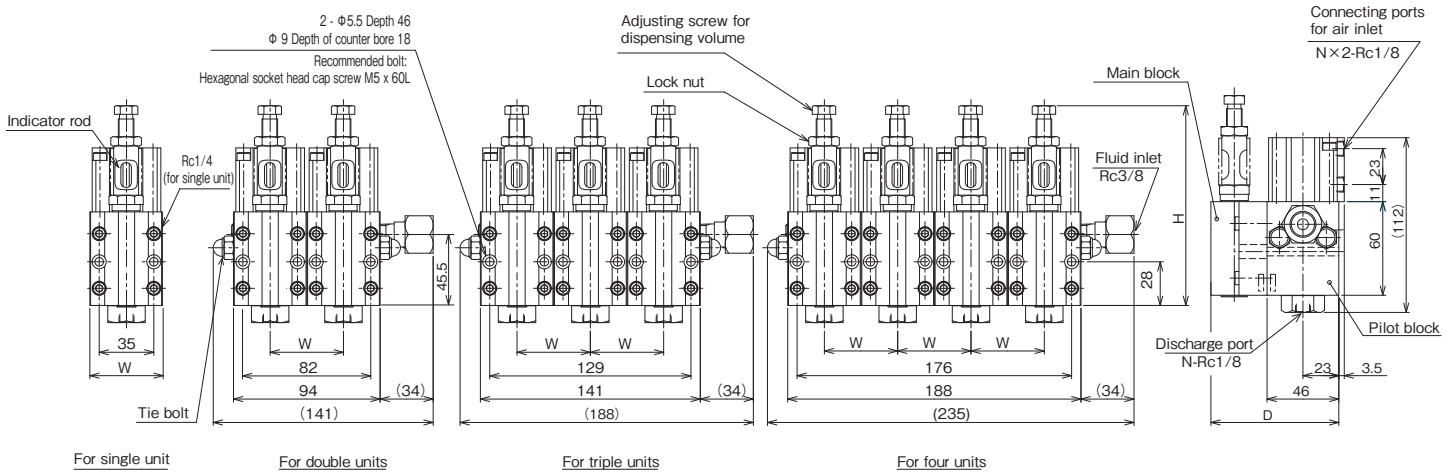

In case of Model For CVM-03/10/50

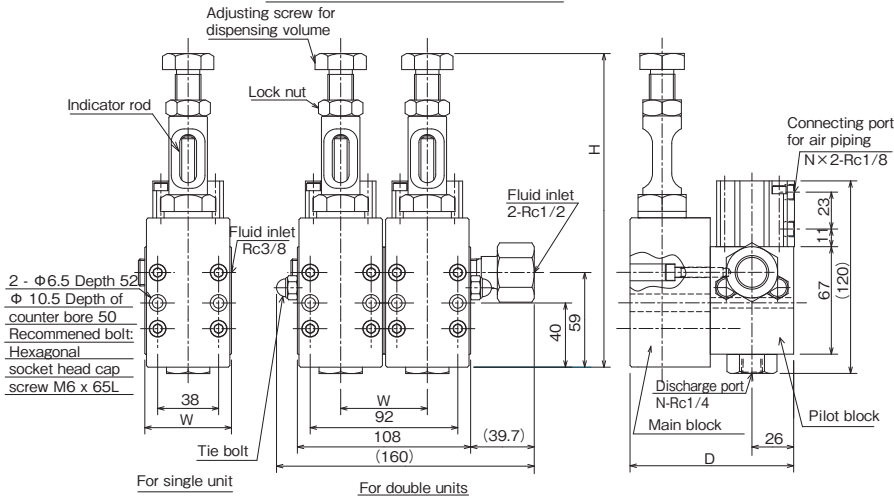

In case of Model CVM 100/200



\*N indicates the number of ports.

Model	Dimension (For Single Unit)		
	W	D	H(MAX)
CVM-03	47	82	104.2
CVM-10	47	82	128.0
CVM-50	47	82	176.3
CVM-100	54	102	195.5
CVM-200	54	110	247

When using units in series as shown in this drawing, use the tie bolts below (sold separately).

Model	Description	Product code
CVM-03/10/50	Tie bolt set 2-CVM (2 units)	RK870800
	Tie bolt set 3-CVM (3 units)	RK870900
	Tie bolt set 4-CVM (4 units)	RK871000
CVM-100/200	Tie bolt set 2-CVM-100 (2 units)	RK873700

## Time chart

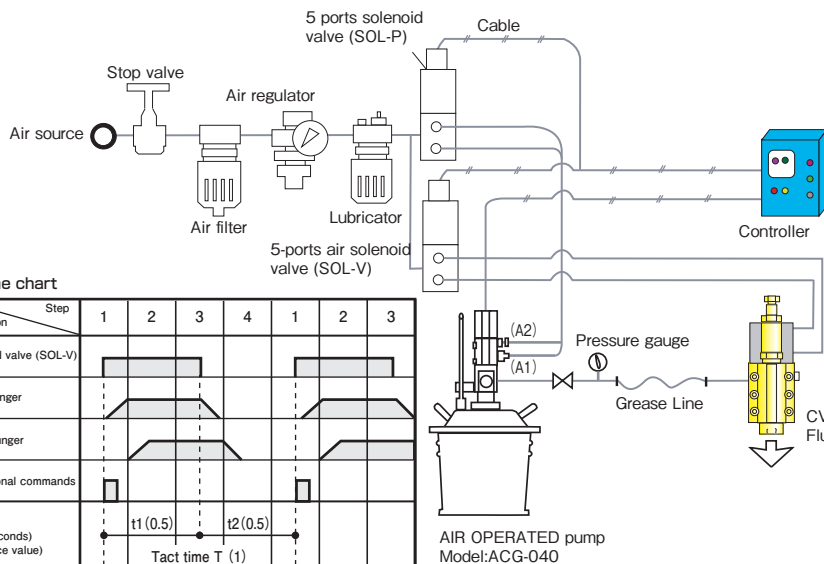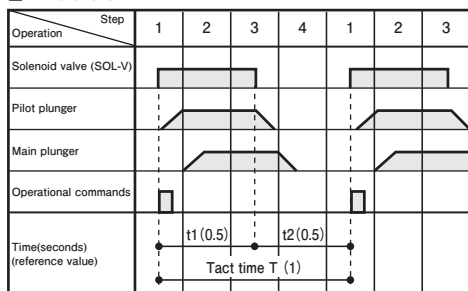


# CVN Precise Fluid Dispenser

High Pressure Specification

- It is 30% lightweight compared with CVM-03 type. The size is compact.
  - Improved stability and maintainability in supplying a small amount of lubricant.
- (\*)Time chart is the same of CVM (refer to page 17)

Supply material:Grease(Oil is not applicable.)

Item	Specifications	
	CVN-02	
Dispensing volume	0.03~0.2cm <sup>3</sup> /Stroke	
Working pressure range	Grease line	5.9~20.6MPa
	Air line	0.3~0.7MPa
Proof pressure for grease line	20.6MPa	
Used grease	NLGI No.0~No.2	
Produce No.	RK389200	
Mass	Approx1.0kg	

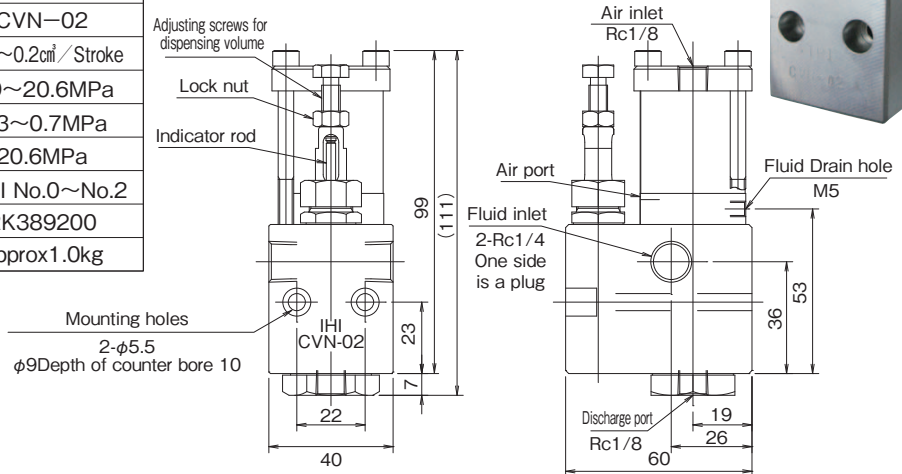


## Description of CVN Dispenser Operation

### 1 Standby

SOL-V OFF


With the air solenoid valve OFF, The air piston and pilot plunger rises (up) under the force of spring. The main plunger stops at the top point due to difference in the area receiving the pressure. In this case, the grease comes through the inlet into the bottom side of the main plunger for filling.

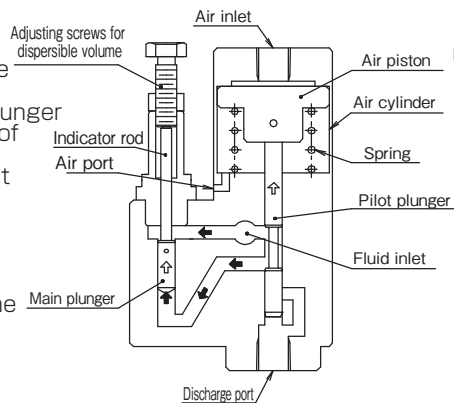

### 2 Pilot plunger goes down

SOL-V ON


When the air solenoid valve is turned ON, the air comes from the top of air cylinder, lowering the pilot plunger. Accordingly, the grease that has come through the inlet flows through the upper pass to come in the top of main plunger. On the other hand, the lower pass of main plunger is connected to the discharge port.

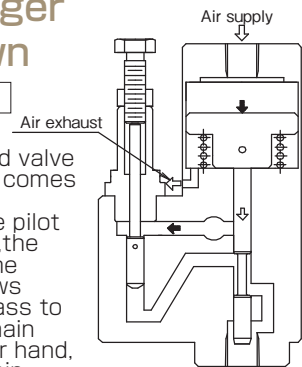

### 3 Dispensing process

SOL-V ON


The discharge port opens to the atmosphere, so that the main plunger lowers under the grease pressure, dispensing the grease filled in the lower chamber.

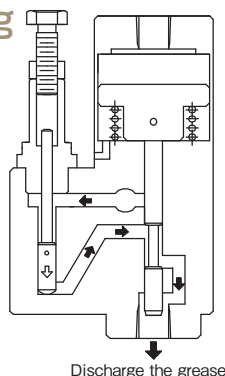

### 4 Pilot plunger goes up

SOL-V OFF


With the solenoid valve OFF, (with the top side (A) opening to the atmosphere). The pilot plunger rises along with the air piston. Under the force of spring. Accordingly, the grease flowing through the inlet comes the bottom side of main plunger, and the main plunger rises due to difference in the area receiving the pressure. In the case, the dispenser draws back the fluid accumulating in the discharge port. Preventing fluid dripping. The function is called "Suction back".

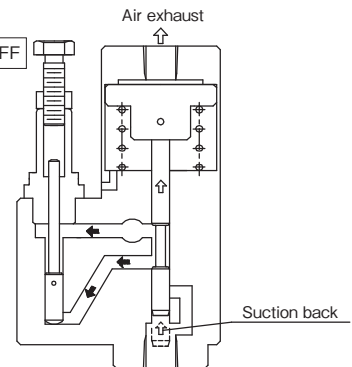


# Checking - sensor for Precise Fluid Dispenser

The attached sensor electrically verifies the operation of the Precise Fluid Dispenser (indicator rod).

## ACV Series

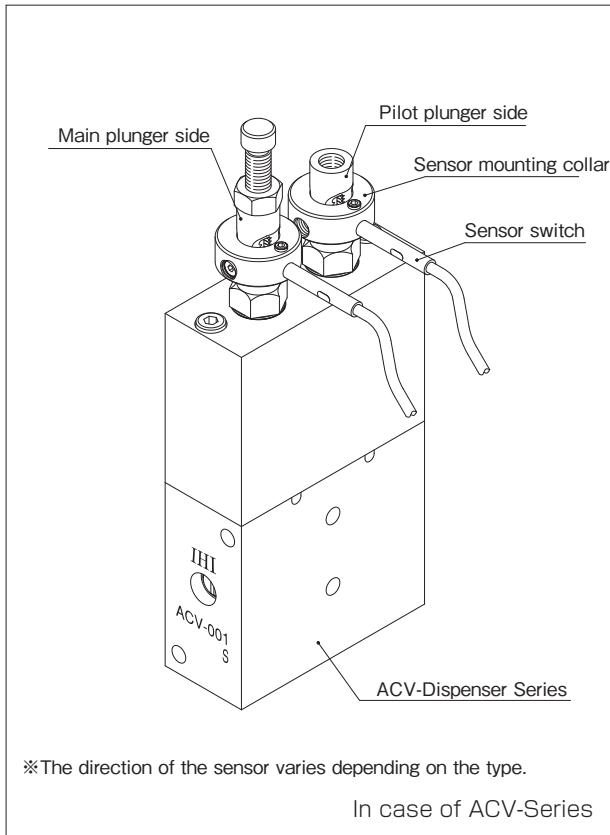

## CVM Series

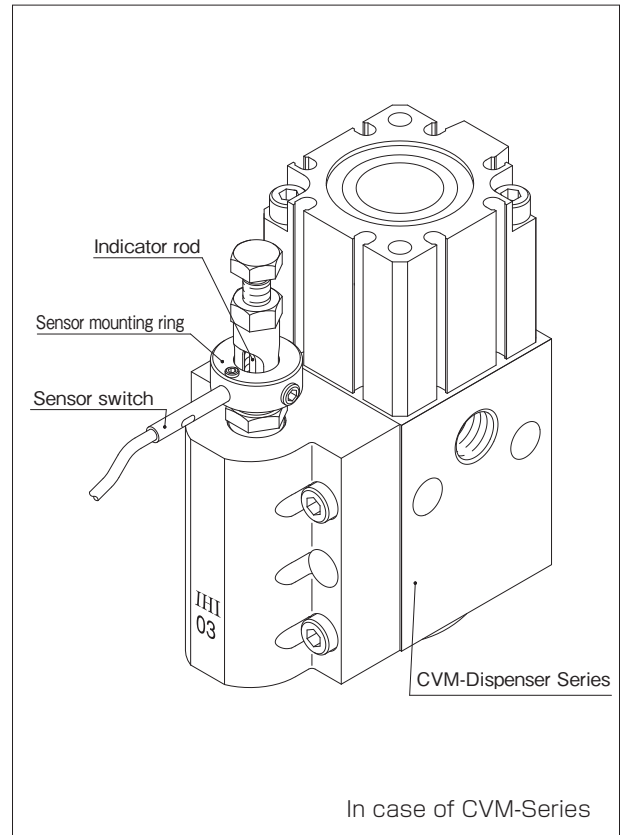


## Basic Sensor Specifications

Note: Sensor specifications may be changed. Please contact us for details.

Item	Specifications
Power source voltage	12~24 DC±10% Ripple P-P 10% or less
Consumption current	15 mA or less
Output	NPN transistor open collector <ul style="list-style-type: none"> <li>• max current entry: 50 mA</li> <li>• applied voltage: 30 V DC or less</li> <li>• residual voltage: 0.4 V DC or less (at current entry 50mA)</li> </ul>
Operation indicator lamp	Red LED (On when output is ON without indicator rod)
Protection structure	IP67 (IEC), immersion proof type (JIS)
Cable length	3m

## Circuit Diagram

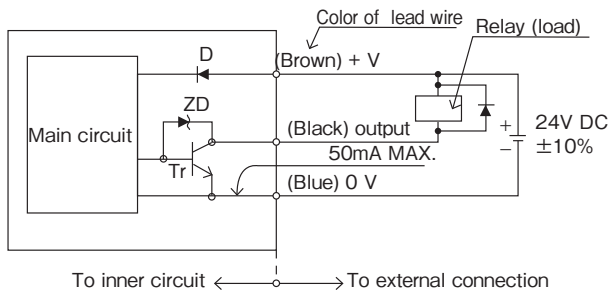

Symbols.....D: Diode to protect against power reverse connection  
 ZD: Zener diode to absorb surge voltage  
 Tr: NPN power transistor

## Product Code for Sensor

Model	Product code
For ACV-001, ACV-002, CVM-03	RK472100
For ACV-010, CVM-10	RK472200
For CVM-50	RK472300
(The above codes are the assembly of a sensor switch and a mounting ring.)	

# Bubble Crusher - AST Series 《For 1- kg to 2.5-kg grease pail》

The AST Series Bubble Crusher is an IHI Proprietary Grease Agitation and Circulation System.

**Are you troubled with No dispensing caused by air bubbles in the grease?**

Air bubbles in grease cause No dispensing from the dispenser (Precise Fluid Dispenser).

**Are you troubled with operation defects caused by oil separation?**

Oil separation in grease causes unevenness in the concentration of included solid particles. This leads to grease pump and dispenser (Precise Fluid Dispenser) malfunction.

**Are you troubled with disposal of residual grease?**

Use of collected residual grease results in air mixed in the grease.

Grease disposal that remains in a pail requires cost for industrial waste treatment.

Patent acquired (PAT. No. 4951546)

Improve matters by innovating the bubble crusher (circulation system) to the dispensing line.



Recycle of disposed grease by innovating the bubble crusher (circulation system) (Reduces disposal costs.)

## Bubble Crusher Unit

ACG-011FK-AST

Item	Specifications
Air-operated pump model	ACG-011FK
Dispensing volume	6.3 cm <sup>3</sup> /cycle
Pump ratio	5 : 1
Dispensing pressure	Max. 2.5 MPa, (with an air pressure of 0.5 MPa)
Supply air pressure	0.2~0.5MPa
Air consumption	64 NL/min (with an air pressure of 0.4 MPa)
Sensor switch / Low level switch Air solenoid valve voltage	DC24V
Bubble crusher	Same as those for AST-02 above
Used grease	NLGI No. 0~2 (for 1-kg to 2.5-kg pail)
Mass	Approx. 9 kg
Product code	RK970300

\*The follower plate is fabricated in accordance with the shape of the grease pail and the composition of the grease.

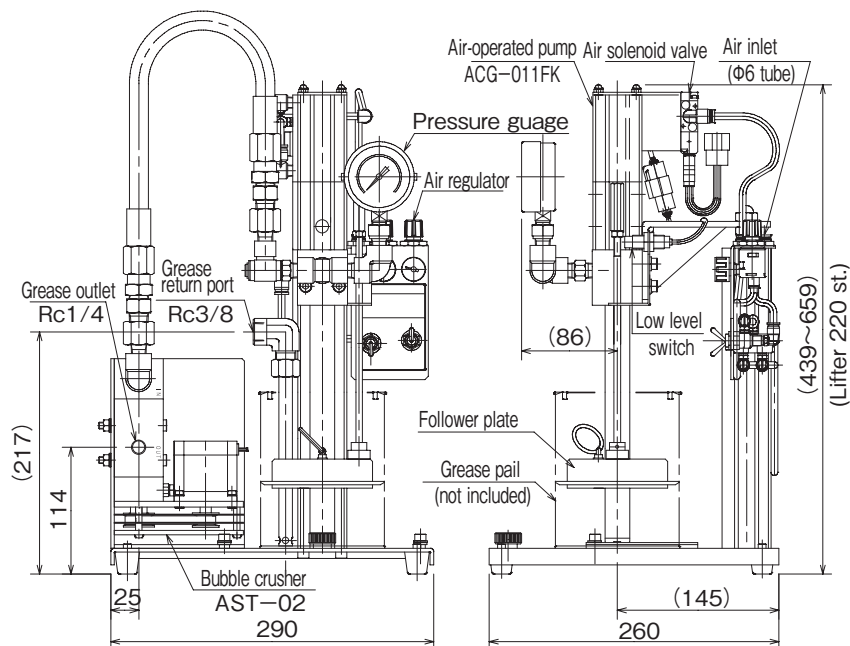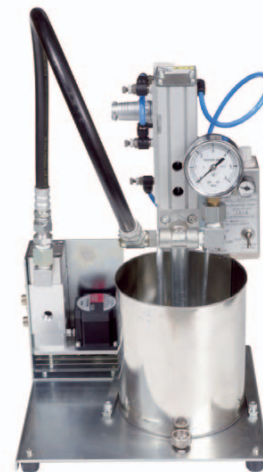


# Bubble Crusher

AST-02

Item	Specifications	
Grease supply pressure	MAX.3MPa	
Used grease	NLGI No.0~No.2	
Applicable pump	ACG-011FK	
Motor	Voltage	AC100V/100/115V (50/60/60Hz)
	Current value	0.08/0.09/0.10A (50/60/60Hz)
Capacitor capacity	1.2 μF	
Mass	Approx. 1.8 kg	
Product code	RK497100	

- \*1. The motor may lock depending on the grease composition and flow rate. In such a case, apply lower the grease supply pressure and flow rate.
- \*2. Periodically inspect and clean the internal filter.

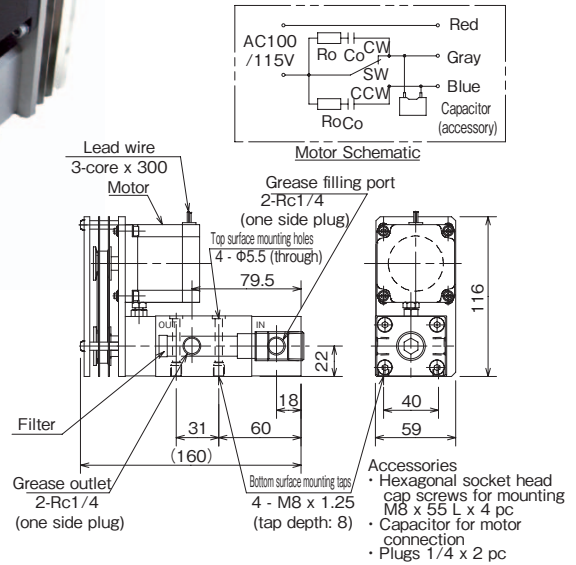


# Bubble Crusher

AST-04

Item	Specifications	
Grease supply pressure	MAX.3MPa	
Used grease	NLGI No.0~No.2	
Applicable pump	ACG-020	
Motor	Maximum output	25W
	Voltage	Single phase AC100V
	Current value	0.7A
	Electricity consumption	60W
	Variable speed	90~1400r/min(50Hz) 90~1500r/min(60Hz)
	Reduction ratio	1 / 3
Mass	Approx. 3.5 kg	
Product code	RK497200	

- \*1. The motor may lock depending on the grease composition and flow rate. In such a case, apply lower the grease supply pressure and flow rate.
- \*2. Periodically inspect and clean the internal filter.

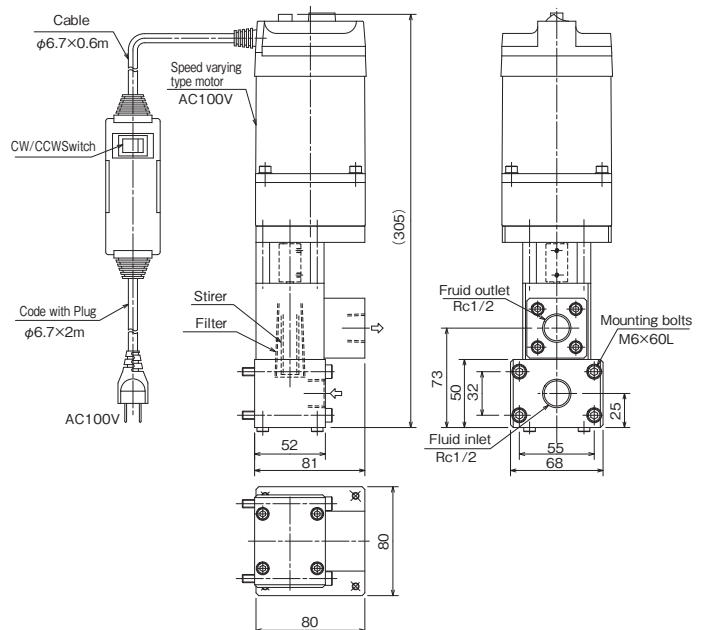


# Agitation and Circulation System Configuration Diagram

In the agitation and circulation system, the bubble crusher is installed between the pump and the Precise Fluid Dispenser.

The circulation circuit is configured with return piping provided from the Precise Fluid Dispenser to the pail.

\*Shorten the piping from the bubble crusher to the Precise Fluid Dispenser to the extent possible.

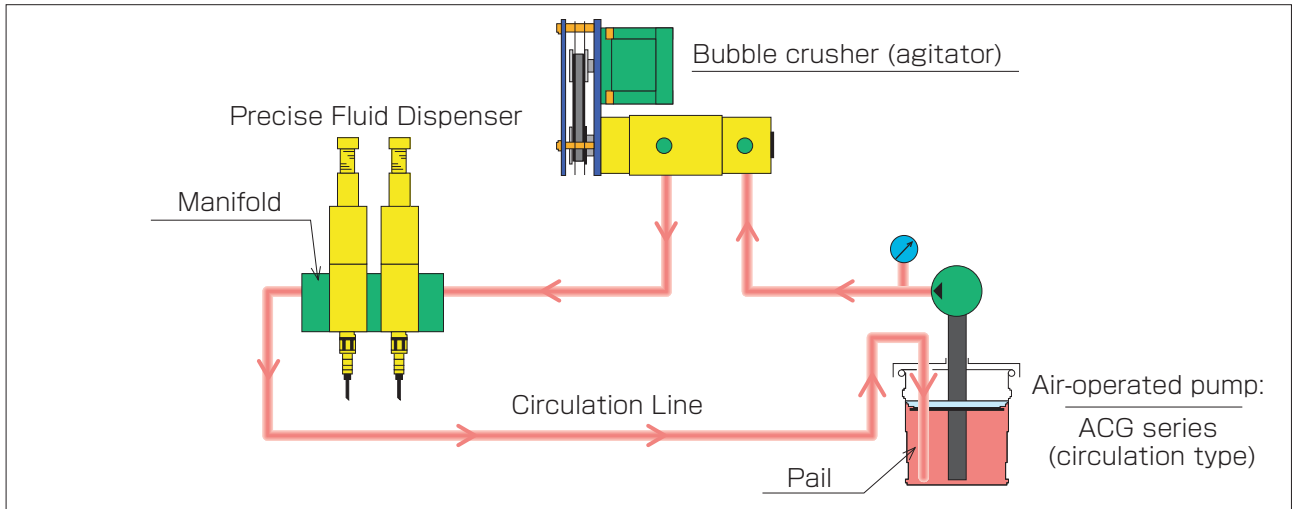


## Agitation and Circulation Effect


(\*The effect of agitation and circulation differs according to the composition of the grease. If you prefer to verify the effect in advance, contact us.)

### Comparison of Air Bubbles Before and After Agitation and Circulation

Comparison of air bubbles before and after agitation and circulation with intentional mixture of air bubbles at a volume of approximately 40 ccf (agitation and circulation time: 30 minutes)

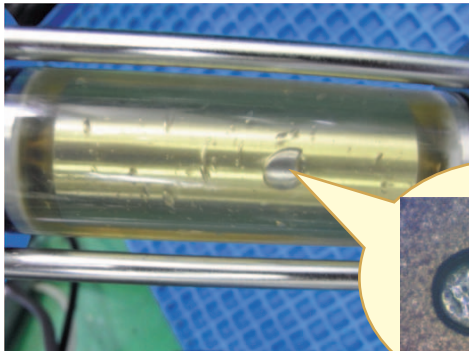

Before Agitation and Circulation

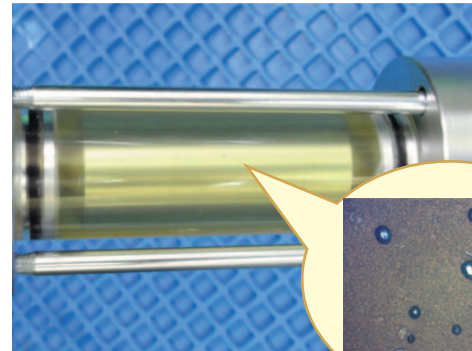


After Agitation and Circulation

Air bubbles are broken up.

### Comparison of Oil Separation

Comparison of Oil Separation Before and After Agitation and Circulation

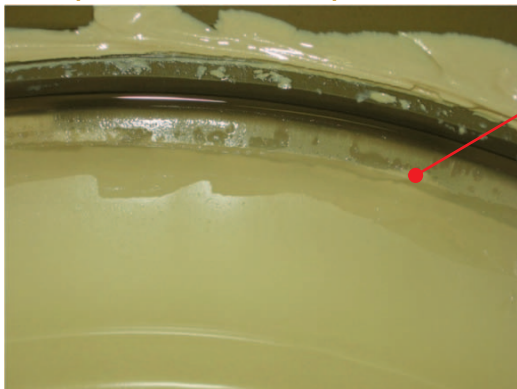

Before Agitation and Circulation



After Agitation and Circulation The oil is evenly mixed.

The photo that we collect the grease to other pail by precise dispenser.

# Controllers

## ACC-200 Controller for ACV Precise Fluid Dispenser

### Outline


ACC-200 controller controls ACV Precise Fluid Dispenser. Two types of operation modes are available for tact discharge operation (timer operation) and external start signal operation (input operation).



### Specifications

Item	Specifications
Model	ACC-200
Product code	RK842200
Power source	AC100V±10%,50/60Hz
Output	Solenoid valve DC24V,MAX.0.2A
Input	Operation signal 1a, Dry contact, max. 1 A
	External start signal 1a, Input by dry contact
	Alarm signal 1a, Input by dry contact
Mass	Approx. 0.8 kg

### Operation Sequence Chart(Refer to P7.)

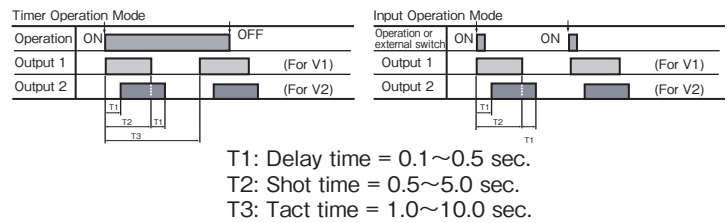

## ACC-300 Controller for ACG Pump

### Outline

ACC-300 type controller is used to control the operation of ACG air-operated pump. Signals from top/bottom limit sensor built-in a pump automatically control the solenoid valve to reciprocate the pump.



### Specifications


Item	Specifications
Model	ACC-300
Product code	RK842300
Power source	AC100V±10%,50/60Hz
Output	Solenoid valve DC24V, MAX.0.2A
Input	S1,S2 signal 1a, Input by dry contact (2 points)
	Alarm signal 1a, Input by dry contact
Mass	Approx. 0.8 kg

### Operation Sequence Chart(Refer to P7.)

By pressing "Operation" button, "Output" becomes ON, which indicates solenoid valve is ON, and the pump cylinder rises. When S2 switch is ON at the upper limit position, "Output" becomes OFF and the pump cylinder moves down. Grease is discharged from the pump by the repetition of this cycle.




### System Configuration

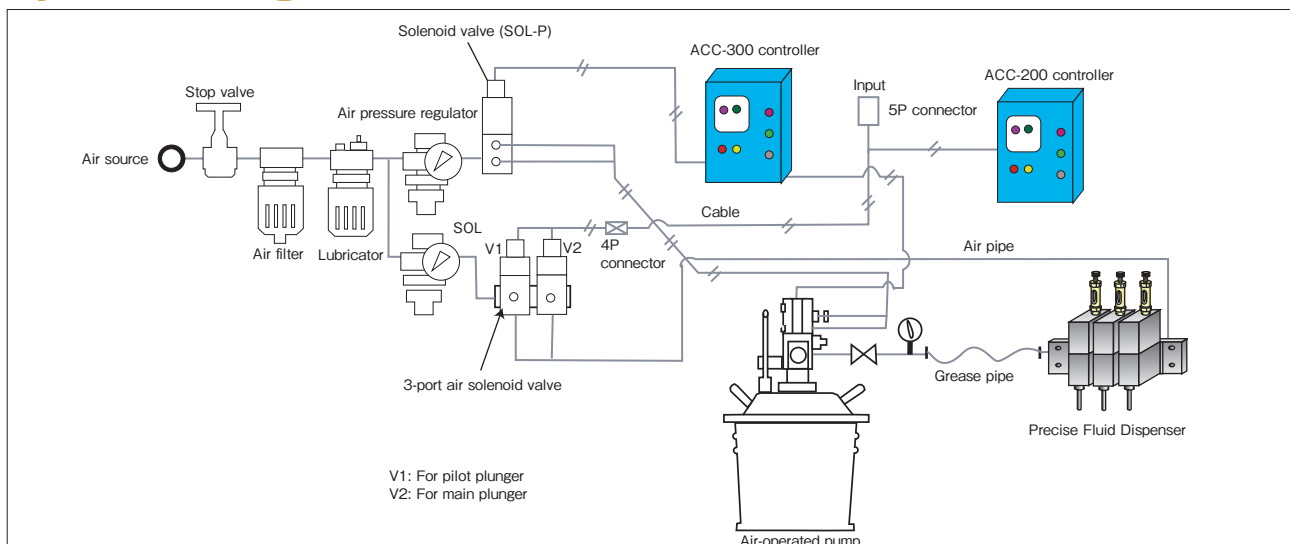



# Air Control Panel

Control equipments of air flow to operate pump and Precise Fluid Dispenser are mounted on this panel.

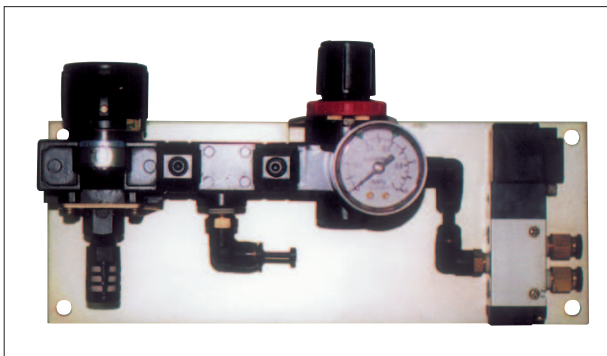


Note 1) Please arrange air filter and lubricator separately if needed.  
 Note 2) This item is made-to-order, please ask us about the delivery date.


## Specifications

Model	AUC-300	AUC-200	AUC-500
Used	For pump	For Precise Fluid Dispenser	For both pump & Dispenser
Operating pressure	Max.0.7Mpa(7kgf/cm <sup>2</sup> )		
Solenoid valve	Operating voltage range DC21.6~26.4V		
	Current value 65 mA (at applied voltage DC24V)		
Mass	Approx. 2kg	Approx. 2kg	Approx. 2.2kg
Product code	RK873400	RK873500	RK873600


## AUC-300 (For ACG Pump)

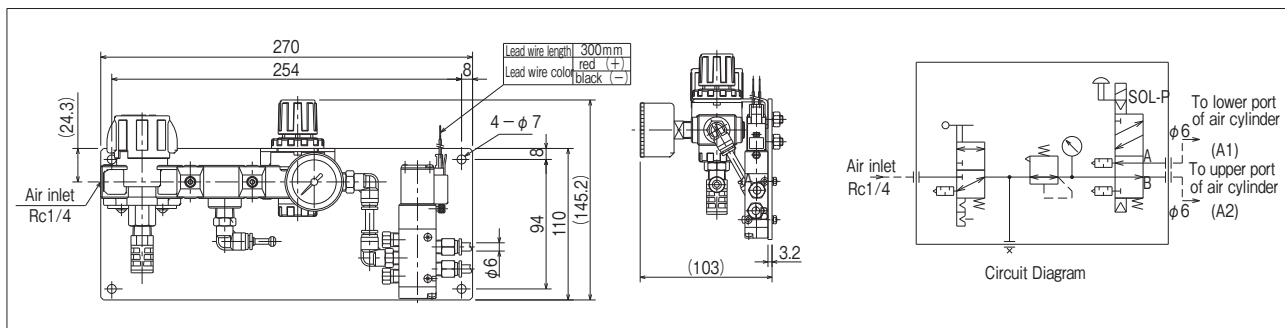

## AUC-200 (For ACV Precise Fluid Dispenser)

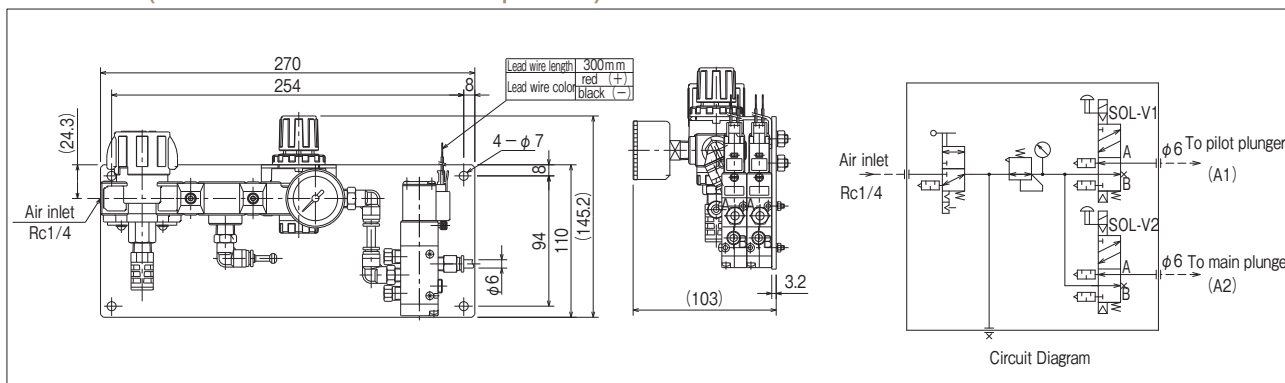

## AUC-500 (For Both ACG Pump & ACV Precise Fluid Dispenser)

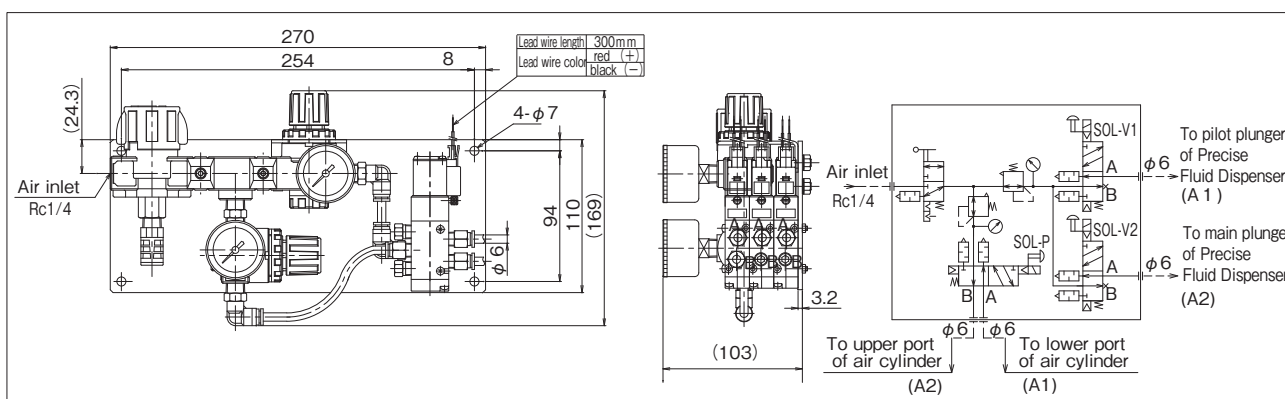

# MEMO

---

# MEMO

---

## Asia

1. Taiwan	Fort Giant Enterprises Co.Ltd. 18F-3,270 Chung Ming South Road Taichung, Taiwan Tel:+886-4-2372-1661 Fax:+886-4-2372-6291
2. CHINA	Shanghai Guanshang Company Room 1001, the 20th Building, No. 487, Tian Lin Road, Shanghai (200233), China TEL: +86-21-5445 3585 FAX: +86-21-5445 3580
	IHI (Shanghai) Management Co.,Ltd 24F Hang Seng Bank Tower, 1000, Lujiazui Ring Road, Pudong New Area, Shanghai China 200120 TEL: +86-21-684-117-17 FAX: +86-21-684-119-19
	INTEGRITY MACHINERY ENGINEERING CO., LTD. Unit K, 4/F, INTERNATIONAL INDUSTRIAL CENTRE,2-8 KWEI TEI STREET, FO TAN, SHATIN, N.T., HONG KONG TEL:+852 2692-4567 FAX:+852 2757-5283
3. Malaysia	Autolub System Engineering 26,Jalan Industri P.B.P 6,Taman Industri Pusat Bandar"Puchong,47100 Puchong Selangor, Malaysia Tel:+60-3-5882-1756 Fax:+60-3-5882-6901
4. Thailand	Autolub System Engineering(Thailand)Co.,Ltd. 657/25 Moo 4 Sukhumvit Road Surasak Sriracha Chonburi 20110,"Thailand Tel:+66-38-311-922 Fax:+66-38-322-087
5. Indonesia	PT. KENDALI PARAMITA Kawasan Industri terpadu Indonesia Cina Kav. 9D, Cikarang-Pusat, Bekasi 17530 Tel:+62-21-22156883 Fax:+62-21-22157779
6. Korea	Dong In C&T Corp. 1010 Daeryung Technotown 8th, 481-11, Gasan-Dong,Kumchon-Ku, Seoul, Korea Tel:+82-2-2163-8670 Fax:+82-2-2163-8679

## Europe

1. Spain	Neubor S.L. Pereda,28-Pol. Ind. Monsolis 08930 Sant Adria del Besos, Spain Tel:+34-934-621-300 Fax:+34-934-622-475
2. HUNGARY	INDUSTOR kft H-2051 Biatorbagy, Jokai u.6., Hungary Tel: +36-30-248-6622 Fax: +36-23-418-133

## Americas

1. U.S.A	IHI INC. 150 East 52nd Street, 24th Floor New York, NY 10022 Tel: +1-212-599-8100 Fax:+1-212-599-8111
2. Mexico	Dositek, S. DE R.L. DE C.V Paseo Constitución #133-A Col.Villas del Parque C.P. 76140 Querétaro, Qro. México Tel: +52-442-248-8086 Fax:+52-442-265-4694

### IHI Rotating Machinery Engineering Co.,Ltd.

LUBRICATING SYSTEM DEPT.

7-12,1 Chome Shinonome Kotou-Ku Tokyo 135-0062 Japan

Phone : 81-3-6703-0440 FAX : 81-3-6703-0443

The appearance and specifications in this catalog are subject to change without notice,  
for improvement



YF53-015 (3-1908) RT